

Working draft (WD) – Tracked version

Project: Review of R51:2006 Automatic catchweighing instruments

Title: OIML R51-1 Automatic catchweighing instruments

Part 1: Metrological and technical requirements

Document number: TC9 SC2 P10 N002

Supersedes document: R 51 (2006)

Project Group: TC 9/SC 2/p 10

☒-Comments by: 26th April 2019

EXPLANATORY NOTE

The 53rd CIML approved as a new project, under the responsibility of TC 9/SC / p10 and under the joint convenorship of the UK (Morayo Awosola), and India (B.N Dixit.) the revision of OIML R51 "Automatic Catchweighing Instruments 2009 E". This working draft has been restructured from two parts into three separate parts:

Part 1: Metrological and Technical Requirements;

Part 2: Testing procedures;

Part 3: Report Format for Type Evaluation.

To align with other D11, some additional tests for disturbance:

- 1) Battery voltage variations during starting up a vehicle engine
- 2) "Load dump" test
- 3) Ripple on DC mains power

No other changes/comments have been implanted in this first working draft.

TC 9/SC 2/p 10 Revision of R51:2006 Automatic catchweighing instruments

Proposal phase: Project Approved: project group forming - 2018-10-14

BIML Contact

Mr. Ian Dunmill

Convener

INDIA (Mr. B.N. Dixit). UNITED KINGDOM (Mr. Morayo Awosola)

Participating members (8)

AUSTRALIA

FRANCE

GERMANY

INDIA

IRAN

NETHERLANDS

P.R. CHINA

SOUTH AFRICA

SWITZERLAND

UNITED KINGDOM

Observer members (33)

AUSTRALIA

AUSTRIA

BELGIUM

BRAZIL

BULGARIA

CANADA

CROATIA

CUBA

CZECH REPUBLIC

DENMARK

FINLAND

HUNGARY

INDONESIA

IRELAND

ITALY

JAPAN

KOREA (R.)

LIBERIA

NIGERIA

NORWAY

POLAND

ROMANIA

RUSSIAN FEDERATION

SAUDI ARABIA

SERBIA

SLOVAKIA

SLOVENIA

SPAIN

SWEDEN

SWITZERLAND

TURKEY

Organizations in liaison

CECIP European
Committee of Weighing
Instruments Manufacturers
COPAMA Confederation of
Packaging Machinery
Associations

ISO International
Organization for
Standardisation

OIML R 51 Automatic catchweighing instruments

UNITED ARAB EMIRATES
UNITED STATES

CONTENTS

Foreword	
Terminology (Terms and definitions)	
1 General Introduction	
2 Scope	
3 Application	
4 Terminology	
4.1 General definitions	
4.2 Construction	
4.3 Metrological characteristics	
4.4 Indications and errors	
4.5 Influences and reference conditions	
4.6 Tests	
4.7 Abbreviations	
25 Metrological requirements	
25.1 Accuracy classes	
25.2 Classification of instruments	
25.3 Additional requirements for multi-interval instruments	
25.4 Auxiliary indicating device	
25.5 Maximum permissible errors	
2.6 Maximum permissible errors for influence factor tests	
2-75.6 Units of measurement	
2-85.7 Permissible differences between results	
2-95.8 Influence factors	
2-105.9 Indication or printout of weight for test purposes (automatic operation)	
36.4 Technical requirements	
36.4.1 Suitability for use	
36.4.2 Security of operation	
36.4.3 Indication of weighing results	
36.4 Digital indicating and printing devices	
36.5 Zero-setting and zero-tracking devices	
36.6 Tare devices	
36.7 Preset tare device	
36.8 Selection of weighing ranges on a multiple range instrument	
36.9 Devices for selection (or switching)	
36.10 Weigh or weigh-price labelling instrument	
36.11 Descriptive markings	
36.12 Verification marks	
475 Requirements for electronic instruments	
475.1 General requirements	
475.2 Functional requirements	
58 Metrological controls	
58.1 General	
58.2 Type approval	
58.3 Initial verification	
58.4 Subsequent metrological control	
69 Test methods	
6109.1 Automatic operation	
6109.2 Nonautomatic (static) operation	
6109.3 Status of automatic correction facilities	
6109.4 Mode of operation for testing	
6109.5 Examination and tests of electronic instruments	
Annex A Testing procedures for automatic catchweighing instruments	
A.1 Examination for type approval	
A.2 Examination for initial verification	
A.3 General test conditions	
A.4 Test program	

A.5 — Metrological performance tests
A.6 — Influence factor and disturbance tests
A.7 — Span stability test

Annex A Bibliography.....

FOREWORD

The International Organization of Legal Metrology (OIML) is a worldwide, intergovernmental organization whose primary aim is to harmonize the regulations and metrological controls applied by the national metrological services, or related organizations, of its Member States.

The two main categories of OIML publications are:

- 1) **International Recommendations (OIML R)**, which are model regulations that establish the metrological characteristics required of certain measuring instruments and which specify methods and equipment for checking their conformity; the OIML Member States shall implement these Recommendations to the greatest possible extent;
- 2) **International Documents (OIML D)**, which are informative in nature and intended to improve the work of the metrological services.

OIML Draft Recommendations and Documents are developed by technical committees or subcommittees which are formed by the Member States. Certain international and regional institutions also participate on a consultation basis.

Cooperative agreements are established between OIML and certain institutions, such as ISO and IEC, with the objective of avoiding contradictory requirements; consequently, manufacturers and users of measuring instruments, test laboratories, etc. may apply simultaneously OIML publications and those of other institutions.

International Recommendations and International Documents are published in French (F) and English (E) and are subject to periodic revision.

OIML publications may be obtained from the Organization's headquarters:

Bureau International de Métrologie Légale
11, rue Turgot - 75009 Paris - France
Telephone: +33 1 48 78 12 82 and 42 85 27 11
Fax: +33 1 42 82 17 27
E-mail: biml@oiml.org
Internet: <http://www.oiml.org>

*
* *

PART 1 – METROLOGICAL AND TECHNICAL REQUIREMENTS

1 INTRODUCTION

This OIML Recommendation consists of 3 separate parts:

Part 1: Metrological and Technical Requirements;

Part 2: Testing procedures;

Part 3: Report Format for Type Evaluation.

2 Scope

This International Recommendation specifies the metrological and technical requirements and test procedures for automatic catchweighing instruments (catchweighers), hereinafter called «instruments», that are subject to national metrological control.

It is intended to provide standardized requirements and testing procedures to evaluate the metrological and technical characteristics in a uniform and traceable way. A standardized test report format is given as part 3 of this Recommendation (R 51-3).

3 Application

This Recommendation applies to instruments that automatically weigh discrete loads or single loads of loose material.

4 TERMINOLOGY (Terms and definitions)

The terminology used in this Recommendation conforms to the *International Vocabulary of Basic and General Terms in Metrology* (VIM) [1], the *International Vocabulary of Legal Metrology* (VIML) [2], the *OIML Certificate System for Measuring Instruments* [3], and to the *OIML International Document for General requirements for Electronic Measuring Instruments* [4]. In addition, for the purposes of this Recommendation, the following definitions apply.

T4.1 General definitions

T4.1.1 Mass

physical quantity, which can be ascribed to any material object and which gives a measure of its quantity of matter. OIML D 28 [8]

The property of an amount of material that causes it to have weight (or “weight value”) in a gravitational field (see OIML R 111) [5].

T2-14.1.2 weight

quantity representing the force resulting from the effect of gravity on a load.

NOTE: In this Recommendation “mass” (or “weight value”) is preferably used in the sense of “conventional mass” or “conventional value of the result of weighing in air” according to OIML R 111 [4] and OIML D 28 [8], whereas “weight” is preferably

used for an embodiment (= material measure) of mass that is regulated in regard to its physical and metrological characteristics.

2.44.1.2.1 Test weights

The material measure of mass that is regulated in regard to its physical and metrological characteristics and maximum permissible error¹. It is used (as standard weights or mass) for the type examination or verification of an instrument.

T2.44.1.3 Load

The quantity representing the material measure of mass due only to the vertically-downward force of gravity as applied on the weighing instrument.

T4.1.4 Weighing

The process of determining the mass of an amount of material from the effects of gravity on this material.

T.4.1.5 Weighing instrument

Measuring instrument that serves to determine the mass of an amount of material by using the action of gravity on this material.

The instrument may also be used to determine other quantities, magnitudes, parameters or characteristics related to mass.

According to its method of operation, a weighing instrument is classified as automatic or nonautomatic.

T-2.44.1.6 Automatic weighing instrument

Instrument that weighs and follows a pre-determined program of automatic processes characteristic of the instrument.

T-2.44.1.7 Automatic catchweighing instrument (catchweigher)

Automatic weighing instrument that weighs pre-assembled discrete loads or single loads of loose material.

T.4.1.7.1 Checkweigher

Catchweigher that sub-divides prepackages of different mass into two or more sub-groups according to the value of the difference between their mass and the nominal set point.

T.4.1.7.2 Weigh labeller

Catchweigher that labels individual pre-assembled discrete loads (e.g. prepackages) with the weight value.

T.4.1.7.3 Weigh-price labeller

Catchweigher that calculates the price to pay on the basis of the indicated mass and the unit price and labels individual pre-assembled discrete loads (e.g. prepackages with the weight value, unit price and price to pay).

T.4.1.7.4 Vehicle mounted instrument

A complete instrument that is firmly mounted on a vehicle, and that is designed for that special purpose.

Note: For example, a garbage weigher (waste collecting vehicle) that determines the quantity of loose material emptied from a container (supported by the load receptor) into the body of the vehicle.

T.4.1.7.5 Vehicle incorporated instrument

An instrument where components of the vehicle are also components of the weighing instrument, i.e. parts of the vehicle (levers, joints and/or force transmission) are used for the instrument.

Note: For example, a front-end loader (front-end loading vehicle) that determines the quantity of loose material held in the bucket (load receptor).

T.4.1.8 Loose material

Material which is not packaged during and/or after the weighing process. The material may be collected for weighing in the load receptor of the instrument (e.g. front-end loader) or in a separate container (garbage weigher).

T.4.1.9 Grading instrument

Instrument which assigns a weighing result to a predetermined range of mass to determine a tariff or toll.

Examples: postal scales, garbage weighers

T.4.1.10 Electronic instrument

Instrument equipped with electronic devices.

T.4.1.11 Control instrument

Weighing instrument used to determine the conventional true value of the mass of the test load(s).

Control instruments used for testing may be:

- separate from the instrument being tested, or
- integral, when a static weighing mode is provided by the instrument being tested.

T.4.1.12 Conventional true value (of a quantity)

A value attributed to a particular quantity (mass of a body) and accepted, by convention, as having an uncertainty appropriate for a given purpose. [VIM 1.20]

T.4.1.13 Metrological authority

A legal entity (i.e. the verification, and/or issuing authority) designated or formally accepted by the government to be responsible for ascertaining that the automatic weighing instrument satisfies all or some specific requirements of this Recommendation.

T.4.1.14 Indications of an instrument

Value of a quantity provided by a measuring instrument.

Note: "Indication", "indicate" or "indicating" includes both displaying and/or printing.

T.4.1.14.1 Primary indications

Indications, signals and symbols that are subject to requirements of this Recommendation.

T.4.1.14.2 Secondary indications

Indications, signals and symbols that are not primary indications.

T.4.1.15 Metrologically relevant

Any device, module, part, component, function or software of a weighing instrument that influences the weighing result or any other primary indication is considered as metrologically relevant.

T.4.2 CONSTRUCTION

Note: In this Recommendation the term «device» is used for any means by which a specific function is performed irrespective of the physical realization e.g. by a mechanism, a key or software initiating an operation; the device may be a small part or a major portion of an instrument.

T.4.2.1 Load receptor

Part of the instrument intended to receive the load.

T.4.2.2 Load-transmitting device

Part of the instrument for transmitting the force produced by the load acting on the load receptor to the load-measuring device.

T.4.2.3 Load-measuring device

Part of the instrument for measuring the mass of the load, and an indicating device.

T.4.2.4 Load conveyor

Device to move the loads on to and off the load receptor.

T.4.2.5 Load transport system

The system used to transport the load over the load receptor.

T.4.2.6 Displaying device (of a weighing instrument)

Device providing the weighing result in visual form.

T.4.2.7 Module

Identifiable part of an instrument that performs a specific function or functions, and that can be separately evaluated according to the metrological and technical performance requirements in the relevant Recommendation. The modules of a weighing instrument are subject to specified partial error limits.

Note: Typical modules of an automatic weighing instrument are: load cell, indicator, analogue or digital data processing device, computer terminal (T.2.24.2.7.6), weighing module, digital display.

T.4.2.7.1 Load cell

Force transducer which, after taking into account the effects of the acceleration of gravity and air buoyancy at the location of its use, measures mass by converting the measured quantity (mass) into another measured quantity (output). OIML R 60 [56]

T.4.2.7.2 Indicator

Electronic device of an instrument that processes the measurement data and displays the weighing result in units of mass.

T.4.2.7.3 Analogue data processing device

Electronic device of an instrument that performs the analogue-to-digital conversion of the output signal of the load cell, and further processes the data, and supplies the weighing result in a digital format via a digital interface without displaying it. It may optionally have one or more keys to operate the instrument.

T.4.2.7.4 Digital data processing device

Electronic device of an instrument that further processes the data, and supplies the weighing result in a digital format via a digital interface without displaying it. It may optionally have one or more keys to operate the instrument.

T.4.2.7.5 Weighing module

That part of the weighing instrument that comprises all mechanical and electronic devices (i.e., load receptor, load-transmitting device, load cell, and analogue data processing device) but not having the means to display the weighing result. It may optionally have devices for further processing (digital) data and operating the instrument.

T.4.2.7.6 Computer terminal

Digital device that has one or more keys to operate the instrument, and a display to indicate the weighing results transmitted via the digital interface of a weighing module or an analogue data processing device.

T.4.2.7.7 Digital display

Either incorporated in the indicator housing or in the computer terminal housing or realised as a display in a separate housing (i.e. terminal without keys), e.g. for use in combination with a weighing module.

T.4.2.7.8 Software

T.4.2.7.8.1 Legally relevant parameter

Parameters that belong to the measuring instrument or device, and define or fulfil functions which are subject to legal control.

The following types of legally relevant parameter can be distinguished: type-specific and device-specific.

T.4.2.7.8.2 Type-specific parameter

Legally relevant parameter with a value that depends on the type of instrument only. Type-specific parameters are part of the legally relevant software. They are fixed at type approval of the instrument.

Examples of type-specific parameters are: parameters used for mass calculation, stability analysis or price calculation and rounding, software identification.

T.4.2.7.8.3 Device-specific parameter

Legally relevant parameter with a value that depends on the individual instrument. Such parameters comprise calibration parameters (e.g. span adjustments or corrections) and configuration parameters (e.g. maximum capacity, minimum capacity, units of measurement, etc). They are adjustable or selectable only in a special operational mode of the instrument may be classified as those that should be secured (unalterable) and those that may be accessed (settable parameters) by an authorised person.

T.4.2.7.8.4 Software identification

A sequence of readable characters of software, and that is inextricably linked to the software (e.g. version number, checksum).

T.4.2.7.8.5 Data storage device

The internal memory storage of the instrument or external (removable) storage device used for keeping measurement data (T.2.34.3.2.4.4) ready after completion of the measurement.

T.4.2.7.8.6 Software separation

The unambiguous separation of software into legally relevant software and non-legally relevant software. If no software separation exists, the whole software is to be considered as legally relevant.

T.2.74.2.8 Electronic parts

T.2.74.2.8.1 Electronic device

Device employing electronic sub-assemblies and performing a specific function. An electronic device is usually manufactured as a separate unit and is capable of being independently tested.

~~T.4.2.8.2~~ 4.2.8.2 Electronic sub-assembly

Part of an electronic device employing electronic components and having a recognizable function of its own.

4.2.8.3 Electronic component

The smallest physical entity that uses electron or hole conduction in semi-conductors, gases or in a vacuum.

~~T.4.2.8.4~~ 4.2.8.4 Indicating device (of a weighing instrument)

The part of the load-measuring device that displays the value of a weighing result in units of mass and may additionally display:

- the difference between the mass of an article and a reference value,
- the mean value and/or the standard deviation of a number of consecutive weighings.

~~T.4.2.8.5~~ 4.2.8.5 Indicating device with a differentiated scale division

Digital indicating device of which the last figure after the decimal sign is clearly differentiated from other figures.

~~T.4.2.8.6~~ 4.2.8.6 Extended indicating device

A device temporarily changing the actual scale interval (d) to a value less than the verification interval (e) following a manual command.

~~T.4.2.9~~ 4.2.9 Supplementary devices

~~T.4.2.9.1~~ 4.2.9.1 Setting device

Device for fixing the limits of mass of the sub-groups.

~~T.4.2.9.2~~ 4.2.9.2 Nominal set point

Value expressed in units of mass preset by the operator by means of the setting device in order to establish the limit between consecutive sub-groups.

~~T.4.2.9.3~~ 4.2.9.3 Adjustment range

The range of weight values close to a set point outside which the weighing results may be subject to excessive relative error.

~~T.4.2.9.4~~ 4.2.9.4 Counter

Device counting the number of loads which have moved on to the load receptor (movement counter) or indicating the number of the loads in each of the sub-groups (division counter).

T.2.24.2.9.5 Sorting device

Device which automatically divide the loads into separate sub-groups.

T.2.24.2.9.6 Levelling device

Device for setting an instrument to its reference position.

T.2.24.2.9.7 Tilt limiting device

Device which prevents the instrument from operating above a predetermined value of tilt.

T.4.2.9.8 Zero-setting device

Device for setting the indication to zero when there is no load on the load receptor.

T.4.2.9.8.1 Nonautomatic zero-setting device

Device for setting the indication to zero by an operator.

T.4.2.9.8.2 Semi-automatic zero-setting device

Device for setting the indication to zero automatically following a manual command.

T.4.2.9.8.3 Automatic zero-setting device

Device for setting the indication to zero automatically without the intervention of an operator.

T.4.2.9.8.4 Initial zero-setting device

Device for setting the indication to zero automatically at the time the instrument is switched on and before it is ready for use.

T.4.2.9.9 Zero-tracking device

Device for maintaining the zero indication within certain limits automatically.

T.4.2.9.10 Tare device

Device for setting the indication to zero when a load is on the load receptor:

- without altering the weighing range for net loads (additive tare device), or
- reducing the weighing range for net loads (subtractive tare device).

It may function as:

- a nonautomatic device (load balanced by operator),
- a semi-automatic device (load balanced automatically following a single manual command),
- an automatic device (load balanced automatically without the intervention of an operator).

T.4.2.9.10.1 Tare balancing device

Tare device without indication of the tare value (T.2.34.3.2.3) when the instrument is loaded.

T.4.2.9.10.2 Tare-weighing device

Tare device that stores the tare value (T.2.34.3.2.3) and is capable of indicating or printing it whether or not the instrument is loaded.

T.4.2.9.10.3 Preset tare device

Device for subtracting a preset tare value (T.2.34.3.2.4.1) from a gross (T.2.34.3.2.1) or net (T.2.34.3.2.2) weight value and indicating the result of the calculation. The weighing range for net loads is reduced accordingly.

T.4.2.10 Dynamic setting

Adjustment intended to eliminate the difference between the static load value and the dynamic load value.

T.4.3 Metrological characteristics

T.4.3.1 Weighing capacity

T.4.3.1.1 Maximum capacity (Max)

Maximum weighing capacity, not taking into account the additive tare capacity.

T.4.3.1.2 Minimum capacity (Min)

Value of the load below which the weighing results may be subject to an excessive relative error.

T.4.3.1.3 Weighing range

Range between the minimum and maximum capacities.

T.4.3.1.4 Maximum tare effect (T+, T-)

Maximum capacity of the additive tare device or the subtractive tare device.

T.4.3.2 Weighing results

Note: The following definitions apply only for instruments that weigh pre-assembled discrete loads (see T.2.1.7) and when the indication has been zero before the load has been applied to the instrument.

T.4.3.2.1 Gross value (G or B)

Indication of the weight value of a load on an instrument, with no tare or preset tare device in operation.

T.4.3.2.2 Net value (NET, N)

Indication of the weight value of a load placed on an instrument after operation of a tare device.

T.4.3.2.3 Tare value (T)

The weight value of a load, determined by a tare weighing device.

T.4.3.2.4 Other weighing values

T.4.3.2.4.1 Preset tare value (P_T)

Numerical value, representing a weight value, that is introduced into the instrument. It is a predetermined tare value that is used for one or several weighings.

Notes:

- 1) "Introduced" includes procedures such as: keying in, recalling from ~~a-data~~data storage, or inserting via an interface.
- 2) "Predetermined" means that a tare value is determined once and is applied to other weighings without determining the individual tare values.

T.4.3.2.4.2 Calculated net value

Value of the difference between a gross or net weight value and a preset tare value.

T.4.3.2.4.3 Final weight value

The weight value that is achieved when the instrument is completely at rest and balanced, with no disturbances affecting the indication.

T.4.3.2.4.4 Measurement data

Value attributed to a measurand, obtained by measurement and subject to national regulation [Adapted from VIM 3.1].

T.4.3.2.5 Stable equilibrium

The condition of the instrument such that the printed or stored weighing values show no more than two adjacent values with one of them being the final weight value.

T.4.3.2.6 Critical points

Test load values at which the maximum permissible error changes.

T.2.3.3.3 Scale divisions

T.2.3.3.3.1 Actual scale interval (d)

Value expressed in units of mass of:

- 1) the difference between the values corresponding to two consecutive scale marks, for analogue indication, or
- 2) the difference between two consecutive indicated values, for digital indication.

T-2.34.3.3.2 Verification scale interval (e)

Value, expressed in units of mass, used for the classification and verification of an instrument.

T-2.34.3.3.3 Number of verification scale intervals (single-interval instrument)

Quotient of the maximum capacity and the verification scale interval:

$$n = \text{Max}/e$$

T-2.34.3.3.4 Multi-interval instrument

Instrument having one weighing range which is divided into partial weighing ranges each with different scale intervals, with the weighing range determined automatically according to the load applied, both on increasing and decreasing loads.

T-2.34.3.3.5 Multiple range instrument

Instrument having two or more weighing ranges with different maximum capacities and different scale intervals for the same load receptor, each range extending from zero to its maximum capacity.

T-2.34.3.4 Operational characteristics

T-2.34.3.4.1 Rate of operation

Number of loads weighed automatically per unit of time.

T-2.34.3.4.2 Warm-up time

The time between the moment power is applied to the instrument and the moment at which the instrument is capable of complying with the requirements.

T-2.34.3.4.3 Nonautomatic (static) operation

A static weighing mode for test purposes.

T-2.34.3.4.4 Automatic operation

The instrument weighs without the intervention of the operator and follows a pre-determined program of automatic processes characteristic of the instrument. The instrument may either weigh statically or dynamically in automatic operation.

T-2.34.3.4.5 Instrument that weighs statically

An instrument that operates with a stable equilibrium (T-2.34.3.2.5) based measuring system during the mass determining process, when the load transport system has stopped or, in the case of vehicle mounted or incorporated catchweighers, the load receptor is stationary.

T-2.34.3.4.6 Instrument that weighs dynamically

An instrument that operates with a non-stable equilibrium based measuring system during the mass determining process while the load transport system is in motion (i.e. the load transport system is moving, or checkweighers fitted with load receptor on which the load

slides, or in the case of vehicle mounted or incorporated catchweighers, the load receptor is in motion).

T.2.34.3.5 Sensitivity

For a given value of the measured mass, the quotient of the change of the observed variable I and the corresponding change of the measured mass M :

$$k = \Delta I / \Delta M$$

T.2.34.3.6 Repeatability

Ability of an instrument to provide results that agree one with the other when the same load is deposited several times and in a practically identical way on the load receptor under reasonably constant test conditions.

T.2.34.3.7 Durability

Ability of an instrument to maintain its performance characteristics over a period of use.

T.2.44.4 Indications and errors

T.2.44.4.1 Methods of indication

T.2.44.4.1.1 Analogue indication

Indication enabling the evaluation of the equilibrium position to a fraction of the scale interval.

T.2.44.4.1.2 Digital indication

Indication in which the scale marks are composed of a sequence of aligned figures that do not permit interpolation to fractions of the scale interval.

T.2.44.4.2 Reading

T.2.44.4.2.1 Reading by simple juxtaposition

Reading of the weighing result by simple juxtaposition of consecutive figures giving the weighing result, without the need of calculation.

T.2.44.4.2.2 Overall inaccuracy of reading

The overall inaccuracy of reading of an instrument with analogue indication is equal to the standard deviation of the same indication, the reading of which is carried out under normal conditions of use by several observers.

T.2.44.4.3 Errors

T.2.44.4.3.1 Error (of indication)

The indication of an instrument minus the (conventional) true value of the mass. [VIM 5.20]

T.2.44.4.3.2 Rounding error of digital indication

Difference between the indication and the result the instrument would give with analogue indication.

T.2.44.4.3.3 Intrinsic error

The error of an instrument, determined under reference conditions. [VIM 5.24]

T.2.44.4.3.4 Initial intrinsic error

The intrinsic error of an instrument as determined prior to the performance and span stability tests.

T.2.44.4.3.5 Mean (systematic) error (\bar{x})

The mean value of the error (of indication) for a number of consecutive automatic weighings of a load, or similar loads, passed over the load receptor, expressed mathematically as:

$$\bar{x} = \frac{\sum_{i=1}^n x_i}{n}$$

where:

x represents the error of a load indication,

\bar{x} is the mean of the errors, and

n is the number of weighings.

T.2.44.4.3.6 Standard deviation of the error (s)

The standard deviation of the error (of indication) for a number of consecutive automatic weighings of a load, or similar loads, passed over the load receptor, expressed mathematically as:

$$s = \sqrt{\frac{\sum_{i=1}^n (x_i - \bar{x})^2}{n-1}}$$

T.4.4.3.7 Maximum permissible errors (MPE)

Extreme values of an error permitted by specifications, regulations, etc. for a given instrument. [VIM 5.21]

T.4.4.3.8 Fault

The difference between the error of indication of an instrument and the intrinsic error.

Note: Principally, a fault is the result of an undesired change of data contained in or flowing through an electronic instrument.

T.4.4.3.9 Significant fault

A fault greater than the verification scale interval e .

A significant fault does not include:

- faults arising from simultaneous and mutually independent causes in the instrument or in its checking facility, or
- faults that imply it is impossible to perform a measurement, or
- faults that are so serious they will inevitably be noticed by all those interested in the measurement, or
- transitory faults that are momentary variations in the indications that cannot be interpreted, memorized or transmitted as a measurement result.

T.4.4.3.10 Span

The modulus of the difference between the two limits of a nominal range [VIM 5.2]

T.4.4.3.11 Span stability

The capability of an instrument to maintain the difference between the indication at maximum capacity and the indication at zero within specified limits over a period of use.

T.4.5 Influences and reference conditions

T.4.5.1 Influence quantity

A quantity that is not the measurand but that affects the result of the measurement. [VIM 2.7]

T.4.5.1.1 Influence factor

An influence quantity having a value within the specified rated operating conditions of the instrument.

T.4.5.1.2 Disturbance

An influence quantity having a value within the limits specified in this International Recommendation but outside the rated operating conditions of the instrument.

T.4.5.2 Rated operating conditions

Conditions of use, giving the ranges of the measurand and of the influence quantities for which the metrological characteristics are intended to lie within the maximum permissible errors specified in this Recommendation. [VIM 5.5]

T.4.5.3 Reference conditions

A set of specified values of influence factors fixed to ensure valid inter-comparison of the results of measurements. [VIM 5.7]

4.6 Tests

4.6.1 Operational test

A test carried out on a complete instrument using a test load or loads of the type that it is intended to weigh, and using the load conveyor or load transport system to move it on to and off the load receptor.

4.6.2 Simulation test

A test carried out on a complete instrument or part of an instrument in which any part of the weighing operation is simulated.

4.6.3 Performance test

A test to verify whether the equipment under test (EUT) is able to accomplish its intended functions.

4.6.4 Span stability test

A test to verify that the EUT is capable of maintaining its performance characteristic over a period of use.

4.7 Abbreviations and symbols

Symbols	Meaning
I	Indication
I_n	n^{th} indication
L	Load
ΔL	Additional load to next changeover point
P	$I + 0.5 e - \Delta L$ = Indication prior to rounding (digital indication)
E	$I - L$ or $P - L$ = Error
E_0	Error at zero load
d	Actual scale interval
e	Verification scale interval
d_T	Preset tare Scale interval
n, n_i	Number of verification scale intervals
p_i	Fraction of the MPE applicable to a module of the instrument which is examined separately.
MPE	Maximum permissible error
MPME	Maximum permissible mean (systematic) error for automatic operation
MPSD	Maximum permissible standard deviation of the error for automatic operation
EUT	Equipment under test
sf	Significant fault
Max	Maximum capacity of the weighing instrument
Min	Minimum capacity of the weighing instrument
$\text{Max}_1, \text{Max}_i, \text{Max}_r$	Maximum capacity of the weighing instrument, rules for indices
U_{nom}	Nominal voltage value marked on the instrument
U_{max}	Highest value of a voltage range marked on the instrument
U_{min}	Lowest value of a voltage range marked on the instrument
DC	Direct current
AC	Alternating current
T	Tare value

I		OIML R 51 Automatic catchweighing instruments
T+	Maximum capacity of the additive tare device	
T−	Maximum capacity of the subtractive tare device	
G or B	Gross value	
N or Net	Net value	
PT	Preset tare value	

AUTOMATIC CATCHWEIGHING INSTRUMENTS

2 GENERAL

2.3 Scope

~~This International Recommendation specifies the metrological and technical requirements and test procedures for automatic catchweighing instruments (catchweighers), hereinafter called «instruments», that are subject to national metrological control.~~

~~It is intended to provide standardized requirements and testing procedures to evaluate the metrological and technical characteristics in a uniform and traceable way. A standardized test report format is given as part 2 of this Recommendation (R 51-2).~~

2.4 Application

~~This Recommendation applies to instruments that automatically weigh discrete loads or single loads of loose material.~~

2.5 Terminology

~~The terminology given in the terminology section shall be considered part of this Recommendation.~~

3 METROLOGICAL REQUIREMENTS

3.15.1 Accuracy classes

Instruments are divided according to their use into two primary categories designated by:

X or Y

Category X applies only to checkweighers used to check prepacked products that are subject to the requirements of OIML R 87 [7].

Category Y applies to all other automatic catchweighing instruments such as weigh-price labellers, postal and shipping scales, and instruments that weigh single loads of loose material.

Note: An instrument can be classified as both category X and category Y, e.g. where an instrument is configured with two separate modes of operation which enable it to operate either as a checkweigher or as a weigh-price labeller.

3.15.1.1 Category X

The primary category is further divided into four accuracy classes:

XI, XII, XIII and XIII

The accuracy classes are supplemented by a factor (x) which is specified by the manufacturer. The value of (x) shall be 1×10^k , 2×10^k , or 5×10^k , k being a positive or negative whole number or zero.

The use of a class for a particular application may be determined by national requirements.

3-15.1.2 Category Y

The primary category is further divided into four accuracy classes:

Y(I), Y(II), Y(a), and Y(b)

The use of a class for a particular application may be determined by national requirements.

3-25.2 Classification of instruments

3-25.2.1 Verification scale interval

The verification scale interval and number of verification scale intervals, in relation to the accuracy class, are given in Table 1.

Table 1

Accuracy class		Verification scale interval (e)	Number of verification scale intervals $n = \text{Max}/e$	
			Minimum	Maximum
XI	Y(I)	$0.001 \text{ g} \leq e^1$	50 000	-
XII	Y(II)	$0.001 \text{ g} \leq e \leq 0.05 \text{ g}$	100	100 000
		$0.1 \text{ g} \leq e$	5 000	100 000
XIII	Y(a)	$0.1 \text{ g} \leq e \leq 2 \text{ g}$	100	10 000
		$5 \text{ g} \leq e$	500	10 000
XIII	Y(b)	$5 \text{ g} \leq e$	100	1 000

On multiple range instruments the verification scale intervals are e_1, e_2, \dots, e_r with $e_1 < e_2 < \dots < e_r$. Min, n and Max are indexed accordingly.

On multiple range instruments, each range is treated basically as an instrument with one range.

3-25.2.2 Minimum capacity (Min)

Min shall be specified by the manufacturer.

For category Y instruments Min shall not be less than:

class Y(I):	100 e		
class Y(II):	20 e	For	$0.001 \text{ g} \leq e \leq 0.05 \text{ g}$ and
	50 e	For	$0.1 \text{ g} \leq e$
class Y(a):	20 e		
class Y(b):	10 e		
Scales used for grading, postal scales and garbage weighers:	5 e		

¹It is normally not feasible to test and verify an instrument to $e < 1 \text{ mg}$ due to the uncertainty of the test loads.

3.35.3 Additional requirements for a multi-interval instrument²

3.35.3.1 Partial weighing range

Each partial weighing range (index $i = 1, 2 \dots$) is defined by:

- its verification scale interval e_i , $e_{i+1} > e_i$,
- its maximum capacity Max_i ,
- its minimum capacity $Min_i = Max_{i-1}$ (for $i = 1$ the minimum capacity is $Min_1 = Min$).

The number of verification scale intervals n_i for each partial range is:

$$n_i = Max_i / e_i$$

3.35.3.2 Accuracy class

e_i and n_i in each partial weighing range shall comply with the requirements given in Table 1 according to the accuracy class of the instrument. Min_1 shall comply with the requirements given in 2.3.25.2.2 according to the accuracy class of the instrument.

3.35.3.3 Maximum capacity of partial weighing ranges

With the exception of the last partial weighing range, the requirements in Table 2 shall be complied with, according to the accuracy class of the instrument.

Table 2

Category X	XI	XII	XIII	XVIII
Category Y	Y(I)	Y(II)	Y(a)	Y(b)
Max_i / e_{i+1}	$\geq 50\,000$	$\geq 5\,000$	≥ 500	≥ 50

3.35.3.4 Instrument with a tare device

Requirements concerning the ranges of a multi-interval instrument apply to the net load, for every possible value of the tare.

² Example for a multi-interval instrument:

Maximum capacity $Max = 2 / 5 / 15 \text{ kg}$ class Y(a)
Verification scale interval $e = 1 / 2 / 10 \text{ g}$

This instrument has one Max and one weighing range from $Min = 20 \text{ g}$ to $Max = 15 \text{ kg}$. The partial weighing ranges are:

$Min_1 = 20 \text{ g}$, $Max_1 = 2 \text{ kg}$, $e_1 = 1 \text{ g}$, $n_1 = 2000$

$Min_2 = 2 \text{ kg}$, $Max_2 = 5 \text{ kg}$, $e_2 = 2 \text{ g}$, $n_2 = 2500$

$Min_3 = 5 \text{ kg}$, $Max_3 = Max = 15 \text{ kg}$, $e_3 = 10 \text{ g}$, $n_3 = 1500$

For automatic operation the maximum permissible errors on initial verification (MPE) (see 2.5.1.23.55.5.1.2) are:

For $m = 400 \text{ g} = 400e_1$ MPE = $\pm 1.0 \text{ g}$

For $m = 1\,600 \text{ g} = 1\,600e_1$ MPE = $\pm 1.5 \text{ g}$

For $m = 2\,100 \text{ g} = 1\,050e_2$ MPE = $\pm 3.0 \text{ g}$

For $m = 4\,250 \text{ g} = 2\,125e_2$ MPE = $\pm 4.0 \text{ g}$

For $m = 5\,100 \text{ g} = 510e_3$ MPE = $\pm 15.0 \text{ g}$

For $m = 15\,000 \text{ g} = 1\,500e_3$ MPE = $\pm 15.0 \text{ g}$

Whenever the variation of the indication due to certain influence factors is limited to a fraction or multiple of e , this means, in a multi-interval instrument, that e is to be taken according to the load applied; in particular, at or near zero load $e = e_1$.

3.45.4 Auxiliary indicating device

For instruments fitted with an auxiliary indicating device such as an indicating device with a differentiated scale division³, the device is permitted only to the right of the decimal sign.

For category Y(a) and Y(b) instruments the use of auxiliary indicating devices shall be limited to testing applications only.

A multi-interval instrument shall not be fitted with an auxiliary indicating device.

Note: Extended indicating devices (see [7.4.2.8.6](#) and [3.4.26.4.2](#)) are not regarded as auxiliary indicating devices.

5.5 Maximum permissible errors

5.5.1 Automatic operation

5.5.1.1 Category X instruments

For a number of consecutive weighings of a net load, greater than or equal to the Min and less than or equal to the maximum capacity (Max), the maximum permissible mean (systematic) error shall be as specified in Table 3.

Table 3

Net load (m) expressed in verification Scale intervals (e)				Maximum permissible mean error for category X instruments	
XI	XII	XIII	XIII	Initial verification	In-service inspection
0 < m ≤ 50 000 50 000 < m ≤ 200 000 200 000 < m	0 < m ≤ 5 000 5 000 < m ≤ 20 000 20 000 < m ≤ 100 000	0 < m ≤ 500 500 < m ≤ 2 000 2 000 < m ≤ 10 000	0 < m ≤ 50 50 < m ≤ 200 200 < m ≤ 1 000	± 0.5 e ± 1 e ± 1.5 e	± 1 e ± 2 e ± 3 e

The maximum permissible standard deviation of the error (random error) shall be as specified in Table 4, multiplied by the class designation factor (x).

³ Figure 1: examples of indicating devices each with a differentiated scale division

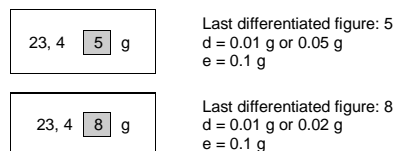


Table 4

Value of the mass of the net load m (g)	Maximum permissible standard deviation (as percentage of m or in grams) for class designation factor x = 1	
	Initial verification	In-service inspection
$m \leq 50$	0.48 %	0.6 %
$50 < m \leq 100$	0.24 g	0.3 g
$100 < m \leq 200$	0.24 %	0.3 %
$200 < m \leq 300$	0.48 g	0.6 g
$300 < m \leq 500$	0.16 %	0.2 %
$500 < m \leq 1\,000$	0.8 g	1.0 g
$1\,000 < m \leq 10\,000$	0.08 %	0.1 %
$10\,000 < m \leq 15\,000$	8 g	10 g
$15\,000 < m$	0.053 %	0.067 %

For classes XI and XII, (x) shall be less than 1

For classes XIII, (x) shall be not greater than 1

For classes XIII, (x) shall be greater than 1

3.55.5.1.2 Category Y instruments

The maximum permissible error for any load greater than or equal to the Min and less than or equal to the Max in automatic operation shall be as specified in Table 5.

Table 5

Load (m) expressed in verification scale intervals (e)				Maximum permissible error for category Y instruments ⁴	
Y(I)	Y(II)	Y(a)	Y(b)	Initial verification	In-service inspection
$0 < m \leq 50\,000$	$0 < m \leq 5\,000$	$0 < m \leq 500$	$0 < m \leq 50$	$\pm 1 e$	$\pm 1.5 e$
$50\,000 < m \leq 200\,000$	$5\,000 < m \leq 20\,000$	$500 < m \leq 2\,000$	$50 < m \leq 200$	$\pm 1.5 e$	$\pm 2.5 e$
$200\,000 < m$	$20\,000 < m \leq 100\,000$	$2\,000 < m \leq 10\,000$	$200 < m \leq 1\,000$	$\pm 2 e$	$\pm 3.5 e$

3.55.5.2 Nonautomatic (static) operation⁵

For category X and category Y instruments, the maximum permissible error for any load greater than or equal to the Min and less than or equal to the Max in nonautomatic (static) operation shall be as specified in Table 6.

⁴This MPE is applicable for instruments with a device for displaying the digital indication with $d \leq 0.2 e$. (see A-3R51-2.3.9.2.1). For instruments without a device for displaying the indication with $d \leq 0.2 e$ the procedure in A-3R51-2.3.9.2.2 shall be applied.

In case the net weight value is calculated by subtraction of 2 individual weighings, the MPEs only apply:

- either to these individual weighings, if they are printed or recorded separately.
- or to net weight value if only the net weight value is printed

⁵As defined in T-3.4.32.3.4.3, therefore 2.5-23.55.5.2 is not applicable for the automatic (static) weighing mode.

Table 6

Load (m) expressed in verification Scale intervals (e)				Maximum permissible error for category X and category Y instruments	
XI and Y(I)	XII and Y(II)	XIII and Y(a)	XIII and Y(b)	Initial verification	In-service inspection
$0 < m \leq 50\,000$	$0 < m \leq 5\,000$	$0 < m \leq 500$	$0 < m \leq 50$	$\pm 0.5 e$	$\pm 1 e$
$50\,000 < m \leq 200\,000$	$5\,000 < m \leq 20\,000$	$500 < m \leq 2\,000$	$50 < m \leq 200$	$\pm 1 e$	$\pm 2 e$
$200\,000 < m$	$20\,000 < m \leq 100\,000$	$2\,000 < m \leq 10\,000$	$200 < m \leq 1\,000$	$\pm 1.5 e$	$\pm 3 e$

3.55.5.3 Maximum permissible errors for influence factor tests

2.6.15.5.3.1 Category X instruments

For automatic operation:

- the maximum permissible mean error shall be as specified in Table 3 for initial verification, and
- the maximum permissible standard deviation of the error shall be as specified in Table 4 for initial verification multiplied by the class designation factor (x).

For nonautomatic (static) operation the maximum permissible errors shall be as specified in Table 6 for initial verification.

2.6.25.5.3.2 Category Y instruments

For automatic operation the maximum permissible errors for each load shall be as specified in Table 5, for initial verification.

For nonautomatic (static) operation the maximum permissible errors shall be as specified in Table 6 for initial verification.

2.73.65.6 Units of measurement

The units of mass to be used on an instrument are the:

- metric carat (ct)⁶
- milligram (mg),
- gram (g),
- kilogram (kg)
- tonne (t).

2.85.7 Permissible differences between results

2.85.7.1 Effect of eccentric loading

If it is possible to pass loads eccentrically, the maximum permissible errors given in the appropriate part or parts of 23.55.5 shall not be exceeded at any eccentric setting (see 67.49.4.4).

⁶ For special applications, e.g. trade with precious stones, the metric carat (1 carat = 0.2 g) may be used as unit of measurement. The symbol for the carat is ct.

2.95.7.2 Agreement between indicating and printing devices

Formatted: Font: Bold

For the same load, the difference between the weighing results (~~T.2.34.3.2~~) provided by any two devices having the same scale interval shall be as follows:

- 1) zero for digital displaying and printing devices;
- 2) not greater than the absolute value of the maximum permissible error for automatic weighing for analogue devices.

2.95.8 Influence factors

Refer to Annex A for test conditions.

2.95.8.1 Temperature

Formatted: Font: Bold

2.95.8.1.1 Temperature limits

Formatted: Font: Bold

If no particular working temperature is stated in the descriptive markings of an instrument, this instrument shall maintain its metrological properties within the following temperature limits:

- 10 °C to + 40 °C

2.95.8.1.2 Special temperature limits

An instrument for which particular limits of working temperature are stated in the descriptive markings shall comply with the metrological requirements within those limits. The limits may be chosen according to the application of the instrument.

The ranges within those limits shall be at least equal to:

- 5 °C for instruments of classes XI and Y(I),
- 15 °C for instruments of classes XII and Y(II),
- 30 °C for instruments of all other classes.

2.95.8.1.3 Temperature effect on no-load indication

Formatted: Font: Bold

The indication at zero or near zero shall not vary by more than one verification scale interval for a difference in ambient temperature of 1 °C for instruments of classes XI and Y(I), and 5 °C for other classes.

2.95.8.2 Voltage supply

Formatted: Font: Bold

An electronic instrument shall comply with the appropriate metrological and technical requirements, if the voltage supply varies from the nominal voltage, U_{nom} (if only one voltage is marked on the instrument), or from the lower and upper limits of the voltage range (U_{min} , U_{max}) marked on the instrument at:

- 1) AC mains voltage: lower limit is 85 % of U_{min} , upper limit is 110% of U_{max} ;
- 2) DC mains voltage, including rechargeable battery if battery can be fully (re)charged during the operation of the instrument: lower limit is the minimum operating voltage, upper limit is 120% of U_{max} (U_{max} is the voltage of a new or fully charged rechargeable battery of the type specified by the manufacturer);
- 3) Battery voltage supply (DC), including non-rechargeable battery voltage, and also

including rechargeable battery voltage supply if (re)charge of batteries during the operation of the instrument is not possible: lower limit is the minimum operating voltage, upper limit is U_{\max} ;

- 4) 12 V or 24 V road vehicle battery voltage supply: lower limit is 9 V (for 12 V battery) or 16 V (for 24 V battery), upper limit is 16 V (for 12 V battery) or 32 V (for 24 V battery).

Note: The minimum operating voltage is defined as the lowest possible operating voltage before the instrument is automatically switched off.

Battery-operated and DC mains powered instruments shall either continue to function correctly or not indicate any weight values if the voltage is below the manufacturer's specified value, the latter being larger or equal to the minimum operating voltage.

2.95.8.3 Tilting

Instruments which are not intended for installation in a fixed position and which do not have a levelling device and a level indicator shall comply with the appropriate metrological and technical requirements when tilted (longitudinally and transversely) by 5%, or when tilted to a predetermined value selected by the manufacturer if the instrument is provided with a tilt limiting device which prevents the instrument from operating when tilted above this value.

Where a levelling device and a level indicator is present it shall enable the instrument to be set to a tilt of 1 % or to the limiting value of tilting as defined by an obvious marking on the level indicator, (e.g. a ring, or a legible notice provided on the instrument in a clearly visible place that points the user to the level indicator). The level indicator shall be fixed firmly on the instrument in a place clearly visible to the user and representative for the tilt sensitive part.

Instruments mounted on or incorporated in vehicles shall comply with the appropriate metrological and technical requirements when tilted (longitudinally and transversely) by 10 %, or when tilted to a lower predetermined value selected by the manufacturer, e.g. 3 %, if the instrument is provided with an automatic tilt limiting device which prevents the instrument from operating when tilted above this value.

2.495.9 Indication or printout for test purposes (automatic operation)

For category X instruments, practical means shall be provided in accordance with 69.1.8 for determining the mean error and the standard deviation of the error to demonstrate compliance with Tables 3 and 4, e.g. indications and/or print-outs of the mass (or the difference between the mass and a nominal set-point).

Note: In normal operation, the sorting device of category X instruments shall work with the same or smaller scale interval d which is used for determining the mean error and standard deviation of the error during type approval and initial verification testing.

For category Y instruments, practical means for determining the individual errors of weighings shall be provided in accordance with 69.1.7.2 to demonstrate compliance with Table 5.

5.10 Span stability

For the span stability, the absolute value of the difference between the errors obtained for any two measurements shall not exceed the maximum span error.

The maximum span error is equal to one half the maximum permissible error for influence

factor tests for a near maximum capacity load.

46 TECHNICAL REQUIREMENTS

34-46.1 Suitability for use

An instrument shall be designed to suit the method of operation and the loads for which it is intended. It shall be of adequately robust construction in order that it maintains its metrological characteristics.

34-26.2 Security of operation

34-26.2.1 Fraudulent use

An instrument shall have no characteristics likely to facilitate its fraudulent use.

34-26.2.2 Accidental breakdown and maladjustment

An instrument shall be so constructed that an accidental breakdown or maladjustment of control elements likely to disturb its correct functioning cannot take place without its effect being evident.

36.2.3 Dynamic setting

An instrument may be fitted with a dynamic setting facility to compensate for the dynamic effects of the load in motion. This facility may operate over a weighing range relative to a setting weight value provided that when the facility is used for that weighing range and in accordance with the manufacturer's instructions, the maximum permissible errors are not exceeded.

Once dynamic setting has taken place to give a weighing range over which the permissible errors are not exceeded, the instrument shall automatically take appropriate action for loads falling outside that range; for these loads printout of weight shall also be inhibited.

Instruments with dynamic setting available to the user (not secured in accordance with 34-26.2.6) shall have a facility to automatically and non-erasably record any adjustment of the dynamic setting, e.g. an event logger. The instrument shall be capable of presenting the recorded data.

36.2.4 Controls

Controls shall be so designed that they cannot normally come to rest in positions other than those intended by design, unless during the manoeuvre all indication is made impossible. Keys shall be marked unambiguously.

36.2.5 Tilt limiting device

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

An instrument mounted on a vehicle may be provided with a tilt limiting device which prevents the instrument from operating if the vehicle is tilted (longitudinally and transversely) above a predetermined value set by the manufacturer.

36.2.6 Securing

Formatted: Font: Bold

Means shall be provided for securing components, interfaces, device-specific parameters and pre-set controls to which access or adjustment is prohibited. National regulation may specify the securing that is required. On classes XI and Y(I) instruments, devices to adjust sensitivity (or span) may remain unsecured.

The introduction into the instrument of data that can influence the instruments metrological properties or measurement results shall be prevented, e.g. by a protective interface (45.2.4).

Components and pre-set controls may be secured by passwords or similar software means provided that any access to the secured controls or functions becomes automatically evident, e.g. by automatically updating a device-specific parameter the value of which at the time of the last verified set-up had been durably marked on the instrument in accordance with the requirements of 34.14.6.11.4.

An instrument may be fitted with a span adjustment device. External influence upon this device shall be practically impossible after securing.

36.2.7 Sorting device

Formatted: Font: Bold

The sorting device of a category X instrument shall automatically divide loads into separate sub-groups depending on their mass.

36.3 Indication of weighing results

36.3.1 Quality of reading

Formatted: Font: Bold

Reading of the primary indications (T-2.44.1.14.1) shall be reliable, easy and unambiguous under conditions of normal use:

- the overall inaccuracy of reading of an analogue indicating device shall not exceed 0.2 e,
- the figures, units and designations forming the primary indications shall be of a size, shape and clarity for reading to be easy.

The scales, numbering and printing shall permit the figures which form the results to be read by simple juxtaposition (see T-2.44.4.2.1).

36.3.2 Form of the indication

Formatted: Font: Bold

Weighing results shall contain the names or symbols of the units of mass in which they are expressed.

For any one indication of weight value, only one unit of mass may be used.

The scale interval for weighing results (T-2.34.3.2) shall be in the form 1×10^k , 2×10^k or 5×10^k units in which the result is expressed, k being a positive or negative whole number or zero.

All indicating, printing and tare weighing devices of an instrument shall, within any one weighing range, have the same scale interval for any given load.

A digital indication shall display at least one figure beginning at the extreme right.

A decimal fraction shall be separated from its integer by a decimal sign (comma or dot), with the indication showing at least one figure to the left of the sign and all figures to the right.

Zero may be indicated by one zero to the extreme right, without a decimal sign.

The unit of mass shall be chosen so that the weight values have not more than one non-significant zero to the right. For values with decimal sign, the non-significant zero is allowed only in the third position after the decimal sign. The units of mass shall be written in small letters (lower case) as indicated in [2.73-65.6](#).

34-36.3.3 Limits of indication

Formatted: Font: Bold

Category Y: There shall be no indication, printing, storing or transmission of weight values above $\text{Max} + 9 e$.

Category X: There shall be no indication, printing, storing or transmission of weight values above $\text{Max} + 9 e$ or $\text{Max} + \text{three times the maximum permissible standard deviation value as specified in Table 4, whichever is the greater.}$

34-36.3.4 Indication or printout for normal operation

For normal operation the scale interval of indications or printouts of individual article weights shall be the verification scale interval e .

The scale interval of indications or printouts of the mean (systematic) error and the standard deviation of the error (or indication), for a number of consecutive automatic weighings of a load, may be to a higher resolution than the verification scale interval e .

36.4 Digital indicating, printing and memory storage devices

The following requirements apply in addition to those in [36.3.1](#) through [36.4.4](#).

36.4.1 Stable equilibrium (~~T-2~~[34.3.2.5](#))

Formatted: Font: Bold

For instruments that weigh statically, equilibrium is deemed to be stable when:

- in case of printing and/or data storage, the printed or stored weighing values show no more than two adjacent values; with one of them being the final weight value (~~T-4.3.2.4.3~~),
- in case of zero or tare operations, a correct operation according to [6.4.3](#) (printing), [36.5.3](#) (control of zero-setting), [36.5.4](#) (stability of automatic zero-setting), [36.5.5](#) (zero-tracking) and [36.6.7](#) (tare-weighing) of the device within relevant accuracy requirements is achieved.

Both conditions shall also be met under continuous or temporary disturbance of the equilibrium

For instruments that weigh dynamically no separate criteria for stable equilibrium are given.

36.4.2 Extended indicating device

An extended indicating device shall not be used on an instrument with an auxiliary indicating device.

When an instrument is fitted with an extended indicating device, displaying the indication with a scale interval smaller than e shall be possible only:

- a) during pressing a key, or
- b) for a period not exceeding 5 seconds after a manual command.

In any case printing shall not be possible.

36.4.3 Printing device

Formatted: Font: Bold

Printing shall be clear and permanent for the intended use. Printed figures shall be at least 2 mm high.

If printing takes place, the name or the symbol of the unit of measurement shall be either to the right of the value or above a column of values.

Printing shall be inhibited if the stability criteria (36.4.1) are not fulfilled.

36.4.4 Data storage device (T-2.24.2.7.8.5)

Formatted: Font: Bold

The primary indications may be stored in a memory of the instrument or on external storage for subsequent use (e.g. indication, printing, data transfer, totalising, etc). In this case, the stored data shall be adequately protected against intentional and unintentional changes during the data transmission and/or storage process and shall contain all relevant information necessary to reconstruct an earlier measurement.

The storage of primary indications shall be inhibited if the stability criteria (36.4.1) are not fulfilled.

36.4.5 Software

The legally relevant software used in the instrument must be present in such a form in the instrument that alteration of the software is not possible without breaking a seal, or any change in the software can be signalled automatically by means of an identification code.

The legally relevant software shall be adequately protected against accidental or intentional changes. Evidence of an intervention such as changing, uploading or circumventing the legally relevant software shall be available until the next verification or comparable official inspection.

The software shall be assigned with a fixed software identification (T-2.24.2.7.8.4). This fixed software identification shall be adapted in the case of every software change that may affect the metrological functions of the instrument.

Software documentation provided with the instrument shall include the following:

- A description of the system hardware, e.g. topology block diagram, type of

computer(s), source code for software functions, etc, and legally relevant software environment;

- A description of the fixed software version number and/or software identification) that is assigned to the metrologically relevant functions;
- A description of the relevant menus and dialogues;
- The securing measures foreseen (e.g. checksum, signature, audit trail);
- A description of the data storage device(s);
- -The operating manual.

36.5 Zero-setting and zero-tracking devices

An instrument shall have one or more zero-setting devices and shall not have more than one zero-tracking device. These devices may be:

- a) non-automatic, or
- b) semi-automatic, or
- c) automatic

36.5.1 Maximum effect

The effect of any zero-setting device shall not alter the maximum weighing capacity of the instrument.

The overall effect of zero-setting and zero-tracking devices shall not be more than 4 %, and of the initial zero-setting device not more than 20 %, of the maximum capacity.

A wider range is possible for the initial zero-setting device if tests show that the instrument complies with the maximum permissible errors in 23-55.5 and 23-65.6, the permissible differences in errors in 2-83-75.7, and the influence factors in 2-93-85.8, for any load compensated by this device within the specified range.

36.5.2 Accuracy

After zero-setting the effect of zero deviation on the result of the weighing shall be not more than 0.25 e.

36.5.3 Control of the zero-setting devices

An instrument whether or not equipped with an initial zero-setting device, may have a combined semi-automatic zero-setting and semi-automatic tare-balancing device operated by the same key.

If an instrument has a zero-setting device and a tare-weighing device the control of the zero-setting device shall be separate from that of the tare-weighing device.

A semi-automatic zero-setting device shall function only:

- a) when the instrument is in stable equilibrium (36.4.1),
- b) if it cancels any previous tare operation.

A nonautomatic or semi-automatic zero-setting device shall not be operable during automatic operation.

36.5.4 Stability of automatic zero-setting device

An automatic zero-setting device may operate at the start of automatic operation, as part of every automatic weighing cycle, or after a programmable time interval. A description of the operation of the automatic zero-setting device (e.g. the maximum programmable time interval) shall be included in the type approval certificate.

The automatic zero-setting device shall operate:

- a) only when the stability criteria (36.4.1) are fulfilled, and
- b) sufficiently often to ensure that zero is maintained within 0.5 e.

Where the automatic zero-setting device operates as part of every automatic weighing cycle, it shall not be possible to disable this device or to set this device to operate at time intervals.

Where the automatic zero-setting device operates after a programmable time interval, the manufacturer shall specify the maximum time interval. The maximum programmable time interval shall not be greater than the value necessary to ensure that the zero error is not greater than 0.5 e (see A-5R51-2, 5.5).

The maximum programmable time interval for automatic zero-setting required above may start again after tare weighing or zero tracking has taken place.

The actual maximum programmable time interval for automatic zero-setting shall be specified taking into account the actual operating conditions of the instrument. The automatic zero-setting device shall either automatically set to zero after the allocated time or should stop the instrument so that a zero-setting operation can occur or be capable of generating information to draw attention to overdue zero setting.

34-56.5.5 Zero-tracking device

A zero-tracking device shall operate only when:

- a) the indication is at zero, or at a negative net value (T-2,34.3.2.2) equivalent to gross zero, and
- b) the stability criteria (36.4.1) are fulfilled, and
- c) the corrections are not more than 0.5 e/second.

When zero is indicated after a tare operation, the zero-tracking device may operate within a range of 4 % of Max around the actual zero.

Note: Zero-tracking is functionally similar to automatic zero-setting. The differences are important in applying the requirements of 36.5. Refer to T-4.2.9.8.3 and T-4.2.9.9. For many types of catchweigher, which have automatic zero-setting, zero-tracking will not be appropriate. The maximum rate of correction applicable to zero-tracking does not apply to zero-setting.

- a) Automatic zero-setting is activated by an event, such as part of every automatic weighing cycle or after a programmed interval.
- b) Zero-tracking may operate continuously (when the conditions of 34-56.5.5 are fulfilled) and must therefore be subject to a maximum rate of correction (0.5 e / second) to prevent interaction with the normal weighing process.

34-66.6 Tare device

34-66.6.1 Scale interval

Formatted: Font: Bold

The scale interval of the tare device shall be equal to the scale interval of the instrument for any given load.

36.6.2 Accuracy

Formatted: Font: Bold

A tare device shall permit setting the indication to zero with a deviation of not more than 0.25 e.

On a multi-interval instrument e shall be replaced by e_1 .

36.6.3 Operating range

Formatted: Font: Bold

The tare device shall be such that it cannot be used at or below its zero effect or above its maximum indicated effect.

36.6.4 Visibility of operation

Operation of the tare device shall be visibly indicated on the instrument. In the case of instruments with digital indication this shall be done by marking the indicated net value (~~T~~4.3.2.2) with the sign "NET"⁷ or "N", and, if applicable, the indicated tare value (~~T~~4.3.2.3) with the sign "T".

Note: If an instrument is equipped with a device that allows the gross value (~~T~~4.3.2.1) to be displayed temporarily while a tare device is in operation, the "NET" symbol shall disappear while the gross value is displayed.

This is not required for an instrument with a combined semi-automatic zero-setting device and a semi-automatic tare-balancing device operated by the same key.

It is permitted to replace the symbols NET and T by complete words in an official language of the country where the instrument is used.

36.6.5 Subtractive tare device

When the use of a subtractive tare device does not allow the value of the residual weighing range to be known, a device shall prevent the use of the instrument above its maximum capacity or indicate that this capacity has been reached.

36.6.6 Multiple range instrument

On a multiple range instrument the tare operation shall be effective also in the greater weighing ranges, if switching to a greater weighing range is possible while the instrument is loaded.

36.6.7 Operation of tare devices

Semi-automatic or automatic tare devices shall operate only when the stability criteria (~~36.4~~.1) are fulfilled.

⁷NET may be displayed as "NET", "Net" or "net".

A nonautomatic or semi-automatic tare device shall not be operable during automatic operation.

36.6.8 Combined zero-setting and tare-balancing devices

If the semi-automatic zero-setting device and the semi-automatic tare-balancing device are operated by the same key, 34.56.5.2 (zero-setting accuracy) and if appropriate 34.66.6.2 (tare-setting accuracy), apply at any load.

36.6.9 Consecutive tare operations

Repeated operation of a tare device is permitted.

If more than one tare device is operative at the same time, tare weight values shall be clearly designated when indicated or printed.

36.6.10 Printing of weighing results

Gross weight values (T.2.34.3.2.1) may be printed without any designation. For a designation by a symbol, only "G" or "B", are permitted.

If only net values (T.2.34.3.2.2) are printed without corresponding gross or tare values, they may be printed without any designation. A symbol for designation shall be "N". These conditions apply also where semi-automatic zero setting and semi-automatic tare balancing are initiated by the same key.

Gross, net, or tare values determined by a multiple range instrument or a multi-interval instrument need not be marked by a special designation referring to the (partial) weighing range.

If net values are printed together with the corresponding gross and/or tare values, the net and tare values shall at least be identified by the corresponding symbols "N" and "T".

However, it is permitted to replace the symbols G, B, N and T by complete words in an official language of the country where the instrument is used.

If net values and tare values determined by different tare devices are printed separately, they shall be suitably identified.

36.7 Preset tare device

36.7.1 Scale interval

For Category X instruments the scale interval (d_T) shall be equal to or smaller than the verification scale interval (e) of the instrument.

For Category Y instruments the scale interval (d_T) shall be equal or automatically rounded to the scale interval (d) of the instrument.

On a multiple range instrument a preset tare value (T.2.34.3.2.4.1) may only be transferred from one weighing range to another one with a larger verification scale interval but shall then be rounded to the latter. For a multi-interval instrument, the preset tare value shall be entered with the smallest verification scale interval (e_1) of the instrument, and the maximum preset tare value shall not be greater than Max_1 . The indicated or printed calculated net value

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

(~~T.2.34.3.2.4.2~~) shall be rounded to the scale interval of the instrument for the same net weight value.

36.7.2 Modes of operation

Formatted: Font: Bold

A preset tare device may be operated together with one or more tare devices provided that:

- a) ~~36.6.9~~ (consecutive tare operations) is respected, and
- b) a preset tare operation cannot be modified or cancelled as long as any tare device operated after the preset tare operation is still in use.

Preset tare devices may operate automatically only if the preset tare value is clearly identified with the load to be measured (e.g. by bar code identification on the container).

36.7.3 Indication of operation

Formatted: Font: Bold

For the indicating device ~~36.6.4~~ (visibility of operation) applies. It shall be possible to indicate the preset tare value at least temporarily.

~~34.66.6.10~~ applies accordingly provided that:

- a) if the calculated net value is printed at least the preset tare value is printed as well.
- b) preset tare values are designated by the symbol "PT"; however, it is permitted to replace the symbol "PT" by complete words in an official language of the country where the instrument is used.

36.8 Selection of weighing ranges on a multiple range instrument

The range that is actually in operation shall be clearly indicated.

36.8.1 Manual selection

Formatted: Font: Bold

Manual selection of the weighing range is allowed:

- a) from a smaller to a greater weighing range, at any load,
- b) from a greater to a smaller weighing range, when there is no load on the load receptor, and the indication is zero or at a negative net value; the tare operation shall be cancelled, and zero shall be set to $\pm 0.25 e_1$, both automatically.

Manual selection of the weighing range shall be inhibited during automatic operation.

36.8.2 Automatic selection

Formatted: Font: Bold

Automatic change over is allowed:

- a) From a smaller to the following greater weighing range when the load exceeds the maximum gross weight value of the range being operative,
- b) Only from a greater to the smallest weighing range when there is no load on the load receptor, and the indication is zero or at a negative net value; the tare operation shall be cancelled and zero shall be set to $\pm 0.25 e_1$, both automatically.

36.9 Devices for selection (or switching) between various load receptors, load-transmitting devices and various load-measuring devices

36.9.1 Compensation of no-load effect

The selection device shall ensure compensation for the unequal no-load effect of the various load receptors - load-transmitting devices in use.

Formatted: Font: Bold

36.9.2 Zero-setting

Zero-setting of an instrument with any multiple combination of various load-measuring devices and various load receptors shall be possible without ambiguity and in accordance with the provisions of ~~34-56.5~~.

Formatted: Font: Bold

34-96.9.3 Impossibility of weighing

Weighing shall not be possible while selection devices are being used.

Formatted: Font: Bold

34-96.9.4 Identification of the combinations used

Combinations of load receptors and load-measuring devices used shall be readily identifiable.

Formatted: Font: Bold

~~34-106.10~~ Weigh or weigh-price labelling instrument

A weigh or weigh-price labelling instrument shall have at least one displaying device for the weight value. It may be used temporarily for set-up purposes such as supervision of weight value setting limits, unit prices, preset tare values and commodity names.

It shall be possible to verify the actual values of unit price and preset tare during automatic operation.

~~34-106.10.1~~ Price computing

The price to pay shall be calculated and rounded to the nearest interval of price to pay by multiplication of weight value and unit price, both as indicated or printed by the instrument. The device which performs the calculation is considered a part of the instrument.

The interval of price to pay, and the monetary symbols and location shall comply with national regulations applicable to trade.

The unit price shall be in the form of: Price/100 g or Price/kg, or specified in accordance with national regulations applicable to trade.

Formatted: Font: Bold

~~34-106.10.2~~ Totalisation

An instrument may totalize weight values and price data on one or more tickets or labels provided that the total values are identified by a special word or symbol. All totals shall be the algebraic sums of all the values printed.

Formatted: Font: Bold

36.10.3 Printing

When price computing transactions performed by the instrument are printed, the weight value, unit price and price to pay shall all be printed.

Formatted: Font: Bold

The data may be stored in a memory of the instrument before printing. The same data shall not be printed twice on the ticket or label.

Printing below minimum capacity shall not be possible.

36.11 Descriptive markings

Instruments and associated modules shall bear the following markings, variable according to national regulation, at each location having a mass indicating and/or printing device.

34-446.11.1 Markings shown in full

Formatted: Font: Bold

- name or identification mark of the manufacturer
- name or identification mark of the importer (if applicable)
- serial number and type designation of the instrument
- maximum rate of operation (if applicable) in the form:loads/min or units/min
- maximum speed of load transport system (if applicable) in the form: ...m/s or m/min
- electrical supply voltage in the form: ...V
- electrical supply frequency in the form: ...Hz
- pneumatic/hydraulic pressure (if applicable) in the form: kPa
- adjustment range referred to set point (if applicable) in the form: \pm ...g or % (of set point value)
- temperature range (when not -10°C to 40°C)
- software identification (if applicable)

36.11.2 Markings shown in code

- type approval sign
- indication of the accuracy class, e.g. XI(0.5) or Y(a)
- verification scale interval in the form: $e = \dots$
- actual scale interval in the form: $d = \dots$
- maximum capacity in the form: Max
- minimum capacity in the form: Min
- maximum tare additive in the form: $T = +$
- maximum tare subtractive in the form: $T = -$

36.11.3 Supplementary markings

Depending upon the particular use of the instrument, supplementary markings may be required on type approval by the metrological authority issuing the type approval certificate (for example: securing code, date of manufacture).

Additional markings (for example, products) may be required on initial verification to specify types of packs and related weighing conditions.

36.11.4 Presentation of descriptive markings

Descriptive markings shall be indelible and of a size, shape and clarity that permit legibility under normal conditions of use.

Descriptive markings may be either in the national language or in form of adequate, internationally agreed and published pictograms or signs.

They shall be grouped together in a clearly visible place on the instrument, either on a descriptive plate or sticker fixed permanently to the instrument, or on a non removable part of the instrument itself. In case of a plate or sticker which is not destroyed when removed, a means of securing shall be provided, e.g. a non removable control mark that can be applied

It shall be possible to seal the plate bearing the markings, unless it cannot be removed without being destroyed.

Alternatively, the descriptive markings may be simultaneously shown on a display which is controlled by software either permanently or on manual command provided that:

- a) the markings: Max..., Min..., e, d if $d \neq e$, and X(x) and/or Y(y) shall be shown at least in one place and permanently either on the display or near to the display in a clearly visible position, and are permanently and simultaneously shown (or alternating one after each other) on the display of the weighing result as long as the instrument is switched on;
- b) the other markings may be shown on manual command;
- c) the markings are considered as device-specific parameters (see [4.2.24.2.7.8.3](#)) and shall comply with the requirements for securing in [34.26.2.6](#).

When a software controlled display is used, the plate of the instrument shall bear at least the following markings:

- max, min and d shall be shown near the display if not already located there;
- type approval sign in accordance with national requirements;
- name or identification mark of the manufacturer/ type/ serial number;
- electrical supply voltage;
- electrical supply frequency;
- pneumatic / hydraulic pressure.

[36.12](#) Verification marks

[36.12.1](#) Position

Instruments shall have a place for the application of verification marks. This place shall:

- a) be such that the part on which it is located cannot be removed from the instrument without damaging the marks,
- b) allow easy application of the mark without changing the metrological qualities of the instrument,
- c) normally be visible without the instrument having to be moved when it is in service.

[36.12.2](#) Mounting

Instruments required to bear verification marks shall have a verification mark support, at the place provided for above, which shall ensure the conservation of the marks. The type and method of sealing shall be determined by national prescription.

457 REQUIREMENTS FOR ELECTRONIC INSTRUMENTS

Electronic instruments shall comply with the following requirements, in addition to the applicable requirements of all other clauses of this Recommendation.

47.1 General requirements

47.1.1 Rated operated conditions

Electronic weighing instruments shall be so designed and manufactured that they do not exceed the maximum permissible errors under rated operating conditions.

47.1.2 Influence factors

An electronic instrument shall comply with the requirements of ~~2.93.85.8~~ and shall also comply with appropriate metrological and technical requirements at a relative humidity of either 85 % (non-condensing) or 93 % (condensing) at the upper limit of the temperature range.

~~Note: This is not applicable to an electronic instrument of classes XI and Y(I), and of classes XII and Y(II) if e is less than 1 g.~~

47.1.3 Disturbances

Electronic instruments shall be so designed and manufactured that when exposed to disturbances, either

- a) significant faults do not occur, i.e. the difference between the weight value indication due to the disturbance and the indication without the disturbance (intrinsic error) does not exceed 1 e, or
- b) significant faults are detected and acted upon. The indication of significant faults in the display should not be confusing with other messages that appear in the display

Note: A fault equal to or less than the value specified in ~~T.2.44.4.3.9~~ (1 e) is allowed irrespective of the value of the error of indication.

47.1.4 Durability

The requirements in ~~7.1.1~~, ~~47.1.2~~ and ~~47.1.3~~ shall be met durably in accordance with the intended use of the instrument.

47.1.5 Evaluation for compliance

A type of an electronic instrument is presumed to comply with the requirements of ~~47.1.1~~, ~~47.1.2~~ and ~~47.1.3~~ if it passes the examination and tests specified in Annex A.

47.1.6 Application

The requirements for disturbances in ~~47.1.3~~ may be applied separately to:

- a) each individual cause of significant fault, and/or
- b) each part of the electronic instrument.

The choice of whether ~~47.1.3~~ (a) or (b) is applied is left to the manufacturer.

Formatted: Font: Bold

Formatted: Font: Bold

7.1.7 **Humidity**

Formatted: Font: Bold

In addition to 7.1.2, instruments shall maintain their metrological and technical characteristics at a relative humidity of either 85 % (non-condensing) or at 93 % (condensing) at the upper limit of the temperature range of the instrument.

Note: This is not applicable to an electronic instrument of classes XI and Y(I), and of classes XII and Y(II) if e is less than 1 g.

47.2 **Functional requirements**

47.2.1 **Indications test**

Formatted: Font: Bold

If the failure of an indicator can cause a false weight value indication then the instrument shall have a display test facility which is automatically initiated at switch-on of indication, e.g. display of all the relevant signs of the indicator in their active and non-active states for a sufficient time to be easily observed by the operator. This is not applicable for non-segmented displays, on which failures become evident, for example screen-displays, matrix-displays, etc.

47.2.2 **Acting upon a significant fault**

Formatted: Font: Bold

When a significant fault has been detected, the instrument shall either be made inoperative automatically or a visual or audible indication shall be provided automatically and shall continue until such time as the user takes action or the fault disappears.

47.2.3 **Warm-up time**

During the warm-up time of an electronic instrument there shall be no indication or transmission of the result of weighing, and automatic operation shall be inhibited.

47.2.4 **Interfaces**

An electronic instrument may be equipped with interfaces permitting the coupling of the instrument to any peripheral devices or other instruments.

An interface shall not allow the metrological functions of the instrument and its measurement data to be inadmissibly influenced by the peripheral devices (for example computers), by other interconnected instruments, or by disturbances acting on the interface.

Functions that are performed or initiated via an interface shall meet the relevant requirements and conditions of [clause 3.46](#).

Note: An "interface" comprises all mechanical, electrical and software devices at the data interchange point between an instrument and peripheral devices or other instruments.

It shall not be possible to introduce into an instrument, through an interface, instructions, software programs or data intended or suitable to:

- a) Display data that are not clearly defined and could be mistaken for a weighing result,
- b) Falsify displayed, processed or stored weighing results,

- c) Adjust the instrument or change any adjustment factor.

An interface through which the functions mentioned above cannot be performed or initiated, need not be secured. Other interfaces shall be secured as per [34-26.2.6](#).

An interface intended to be connected to a peripheral device to which the requirements of this Recommendation apply, shall transmit data relating to primary indications in such a manner that the peripheral device can meet the requirements.

58 METROLOGICAL CONTROLS

58.1 General

The metrological controls of instruments shall, in agreement with national regulation, consist of:

- a) type approval;
- b) initial verification;
- c) subsequent verification;
- d) in-service inspection.

Tests should be applied uniformly by the legal metrology services and should form a uniform program. Guidance for the conduct of type approval and initial verification is provided in OIML International Documents D 19 [\[87\]](#) and [D 20 \[9\]](#) respectively.

58.2 Type approval

58.2.1 Documentation

The application for type approval shall include documentation comprising:

- metrological characteristics of the instrument,
- a set of specifications for the instrument,
- a functional description of the components and devices,
- drawings, diagrams and general software information (if applicable), explaining the construction and operation, and
- any document or other evidence that the design and construction of the instrument complies with the requirements of this Recommendation.

Note: Adherence to requirements for which no test is available, such as software-based operations, may be demonstrated by a specific declaration of the manufacturer (e.g. for interfaces as per [45-27.2.4](#), and for password protected access to device-specific parameters, and set-up and adjustment operations as per [34-26.2.6](#)).

58.2.2 General requirements

Type evaluation shall be carried out on one or more and not normally more than three instruments that represent the definitive type. If the performance of an instrument could be affected by a particular manner of operation or a particular manner of use for which

conditions cannot be duplicated other than in an in-situ operation then at least one of the instruments shall be completely installed at a typical site. At least one of the instruments shall be submitted in a form suitable for laboratory simulation tests. The evaluation shall consist of tests specified in ~~56.28.2.3~~.

~~58.2.3~~ Type evaluation

The submitted documents shall be examined and tests carried out to verify that the instruments comply with:

- a) the metrological requirements in clause 235, particularly with reference to maximum permissible errors on initial verification referred to in ~~23.55.5~~ using test loads described in ~~6.18.1.3.19.1.3~~ or test loads specified by the manufacturer,
- b) the technical requirements in clause 346,
- c) the requirements in Clause 457 for electronic instruments, where applicable.

The metrological authority shall:

- a) conduct the tests in a manner that prevents an unnecessary commitment of resources,
- b) permit the results of these tests to be assessed for initial verification when the same instrument is involved.
- c) check that an instrument used in nonautomatic (static) operation in accordance with 25.5.2, meets the weighing performance test requirements in OIML R 76-1 ~~[406]~~.

~~58.2.3.1~~ Operational tests

Tests shall be done as follows:

- a) in accordance with the descriptive markings (~~36.11~~),
- b) under the normal conditions of use for which the instrument is intended, and
- c) in accordance with the test methods in clause 679.

The metrological authority may require the applicant to supply test loads, equipment and personnel to perform the tests.

The metrological authority may accept, with the consent of the applicant, test data obtained from other metrological authorities without repeating the tests.

Accuracy requirements shall be applied in accordance with the appropriate parts of clause 235.

~~58.2.3.2~~ Tests and checks for compliance with technical requirements

Tests and checks shall be done on a complete instrument to assess compliance with the requirements for security of operation in 36.2.

~~58.2.3.3~~ Influence factor tests

Influence factors shall be applied to the complete instrument or simulator as specified in 69.4.5 and in Annex A, in accordance with:

- a) ~~Subclause 2.9~~5.8 for all instruments,

- b) Clause ~~45~~7 for electronic instruments.

58.2.3.4 Apportioning of errors

Where modules of an instrument or system are tested separately the following requirements apply.

The error limits applicable to a module which is examined separately are equal to a fraction p_i of the maximum permissible errors or the allowed variations of the indication of the complete instrument as specified in ~~23-55.5~~. The fractions for any module have to be taken for at least the same accuracy class as for the complete instrument incorporating the module.

The fractions p_i shall satisfy the following equation:

$$p_1^2 + p_2^2 + p_3^2 + \dots \leq 1$$

The fraction p_i shall be chosen by the manufacturer of the module and shall be verified by an appropriate test, taking into account the following conditions:

- a) For digital devices p_i may be equal to 0
- b) For weighing modules p_i may be equal to 1
- c) For all other modules (including digital load cells), the fraction shall not exceed 0.8 and shall not be less than 0.3, when more than one module contributes to the effect in question.

If the metrological characteristics of the load cell or other modules have been evaluated in accordance with the requirements of OIML R 60 [~~65~~], or any other applicable OIML Recommendation, that evaluation shall be used to aid type evaluation if so requested by the applicant.

58.2.4 Place of testing

Instruments submitted for type approval may be tested either:

- a) on the premises of the metrological authority to which the application has been submitted, or
- b) in any other suitable place agreed between the metrological authority concerned and the applicant.

58.2.5 Type approval certificate and determination of classes

The type approval certificate shall state the appropriate accuracy class(es), $X(x)$ and / or $Y(y)$, as specified at type approval stage and be determined by compliance with the metrological requirements at initial verification of each instrument.

58.3 Initial verification

58.3.1 General requirements

Instruments shall be tested to verify that they comply with the metrological requirements in clause 235 (including ~~2-95.8.3~~, but excluding the rest of ~~2-95.8~~) and the technical requirements in clause 3-6 for the type of article(s) for which they are intended and when

Formatted: Font: Bold

Formatted: Indent: Left: 0.75 cm, Hanging: 0.5 cm

Formatted: Font: Bold

operated under the normal conditions of use. (Instruments mounted on or incorporated in vehicles shall be tested as specified in [2.95.8.3](#). Otherwise, only the functional test of the tilt limiting device shall be performed).

Instruments that weigh statically may be tested in nonautomatic mode provided the conditions of [69.4.5](#) are met.

Tests shall be carried out by the metrological authority, in-situ, with the instrument fully assembled and fixed in the position in which it is intended to be used. The installation of an instrument shall be so designed that the weighing operation will be the same whether for the purposes of testing or for normal operation.

[58.3.2](#) Tests

Instruments shall be tested in their normal mode of automatic operation.

Tests shall be done:

- a) in accordance with the descriptive markings ([36.11](#)),
- b) under the rated conditions for which the instrument is intended,
- c) in accordance with the test methods given in [clause 9](#) using test loads described in [69.1.3.2](#).

The metrological authority may require the applicant to supply test loads, equipment and personnel to perform the tests.

Accuracy requirements shall be applied in accordance with the appropriate part or part(s) of [25.5](#).

[58.3.3](#) Conduct of the tests

The metrological authority:

- a) shall conduct the tests in a manner that prevents an unnecessary commitment of resources,
- b) may, where appropriate and to avoid duplicating tests previously done on the instrument for type evaluation under [58.2.3.1](#), use the test results from type evaluation for initial verification.

[58.3.4](#) Determination of accuracy class

[58.3.4.1](#) Category X instruments

For category X instruments the metrological authority shall:

- a) apply the accuracy class requirements for the product(s) used in the tests in accordance with the appropriate parts in [25.5.1.1](#) for initial verification.
- b) verify that the:
 - 1) accuracy classes marked in accordance with [36.11](#) are equal to the accuracy class determined as above and
 - 2) designated accuracy class factor (x) marked in accordance with [36.11](#) is equal to or larger than the factor (x) determined as above under (a).

Note: The accuracy class that was achieved at type approval stage may not be achieved at initial verification if the loads used are significantly less stable or of different dimensions. In this case a lower accuracy class shall be marked in accordance with 25.5.1.1 or 25.5.1.2 and 36.11.2. Marking of a higher accuracy class than was achieved at type approval stage is not permitted.

58.3.4.2 Category Y instruments

For category Y instruments the metrological authority shall apply the requirements for the accuracy class marked in accordance with the appropriate parts specified in 25.5.1.2.

58.4 Subsequent metrological control

58.4.1 Subsequent verification

Subsequent verification shall be carried out in accordance with the same provisions as in 56.38.3 for initial verification.

58.4.2 In-service inspection

In-service inspection shall be carried out in accordance with the same provisions as in 58.3 for initial verification, with the exception that the in-service maximum permissible errors shall be applied.

679 TEST METHODS

69.1 Automatic operation

69.1.1 Values of the mass of test loads

Test loads shall be applied as follows:

- test load values close to Min and Max,
- test load values close to, but not above, two critical points (T.4.3.2.6) in between Min and Max.

Note: To achieve the maximum rate of operation specified for the instrument it may be necessary to use more than one test load at each of the four nominal values above.

69.1.2 Number of test weighings

The minimum number of consecutive test weighings taken and used to determine the mean error and the standard deviation of the error for category X instruments, or the individual errors for category Y instruments, shall be as specified in Table 7.

Table 7

Category	Load	Number of test weighings
X	$m \leq 1 \text{ kg}$	60
	$1 \text{ kg} < m \leq 10 \text{ kg}$	30
	$10 \text{ kg} < m \leq 20 \text{ kg}$	20

	20 kg < m	10
Y	Minimum of 10 for any load	

Note: For category Y instruments the number of test weighings shall be at least 10 unless within the type approval certificate a special test procedure is required.

69.1.3 Types of test load

69.1.3.1 Type approval

Test loads shall be used which comply with the following conditions:

- a) appropriate dimensions,
- b) constant mass,
- c) solid, non-hygroscopic, non-electrostatic, non-magnetic material,
- d) metal-to-metal contact to be avoided.

69.1.3.2 Initial verification, subsequent verification and in-service inspection

Test loads shall be the type of article(s) which are intended to be used.

69.1.4 Conditions of tests

The load transport system shall be set to its maximum speed, and if adjustable by the operator, also at a speed approximately midway through the operating range. If the speed is related to a particular product, set the speed to the preset speed for that product.

Zero shall be set at the start of each test sequence at a given load value.

69.1.5 Control instrument

A control instrument (meeting the requirements in 69.1.5.1) for determining the conventional true value of the mass of each test load shall be available for testing. The control instrument may either be separate or integral.

69.1.5.1 — Accuracy of control instruments

When the instrument under test is used to determine the conventional true value of the mass of the test load (as an integral control instrument), or when instrument other than the instrument being verified is used to determine the conventional true value of the mass of the test load (as a separate control instrument), the control instrument shall ensure the determination of the conventional true value of the mass of each test load to an accuracy of at least one-third of whichever is the smaller of the appropriate maximum permissible errors for automatic weighing in Tables 3 and 4, for category X instruments, and one third of the appropriate maximum permissible errors in Table 5 for category Y instruments.

69.1.6 Conventional true value of the mass of the test load

The conventional true value of the mass of each test load shall be determined using either the separate or the integral control instrument described in 69.1.5.1 as appropriate.

69.1.7 Individual errors of weighings

69.1.7.1 Category X

The individual errors of weighings shall be the difference between the conventional true value of the mass of the test load as described in 69.1.6 and the indicated or printed weight value observed and recorded (see 69.1.8).

69.1.7.2 Category Y

The individual errors of weighings shall be the difference between the conventional true value of the mass of the test load as described in 69.1.6 and the indicated or printed weight value observed and recorded.

To eliminate the effect of rounding error during testing, one of the following shall be used:

- a) the scale interval d shall be $\leq 0.2 e$ (see A.3R51-2, 3.9.2.1)
- b) the mass of the test load shall be selected using the procedure at A.3R51-2, 3.9.2.2

Note: Where the procedure at A.3R51-2, 3.9.2.2 is used it will not be possible to record the individual errors. It will suffice, however, to note whether or not the instrument is within the maximum permissible errors in Table 5.

69.1.8 Indicated weight for category X instruments

For category X instruments, indications and/or printouts of the weight values (or the difference between the weight value and a nominal set-point) shall be provided for each load for determining the mean error and the standard deviation of the error for each test. For this purpose the scale interval d shall not be greater than the appropriate limit for Table 4 multiplied by the class designation factor (x).

Alternatively, other practical means for demonstrating compliance with Tables 3 and 4 shall be provided by agreement with the metrological authority. For example, where suitable facilities, for directly performing these calculations, exist within the instrument under test these may be used provided that they are checked for accuracy before use. In this situation it is not mandatory that the individual weight values are recorded. No specific method of verifying that the instrument meets the calculation requirements is given as the method used will depend on the particular design being tested. However, any methods used shall demonstrate that the correct errors are being calculated as specified in 69.1.7.1, the correct formulae as specified in T.2.44.4.3.5 and T.2.44.4.3.6 are being used for the calculations in the instrument, and shall include at least some checks with loads. Details of the method used shall be recorded in the appropriate place in the type evaluation report.

69.2 Nonautomatic (static) operation

69.2.1 Verification standards

The error of the standard test weights or masses used shall not be greater than one-third of the maximum permissible error for the load as specified in Table 6.

69.2.2 Values of the mass of the test load

Test loads shall be applied as specified for each individual test in Annex A.

69.2.3 Number of weighings

The number of test weighings at each test load may be one.

Formatted: Font: Bold

Formatted: Font: Bold

Formatted: Font: Bold

69.2.4 Test weights indication

For nonautomatic (static) operation the instrument shall be provided with:

- a) a static 'live' weight indication, or
- b) a continually updated weight indication by simulation of the weighing cycle.

For determining the individual errors, the scale interval d shall be $\leq 0.2 e$ or, alternatively, the procedure described in [A-5R51-2, 3.10.2](#) shall be used.

69.3 Status of automatic correction facilities

Status of dynamic adjustment and automatic zeroing facilities shall be as specified for each individual test in Annex A.

69.4 Mode of operation for testing

69.4.1 Span stability testing ([R 51-2, 7](#))

For span stability testing the instrument shall be tested in nonautomatic (static) operation. A single static test load near maximum capacity shall be used.

69.4.2 Disturbance testing ([R 51-2, 6](#))

For disturbance testing the instrument shall be tested in nonautomatic (static) operation. Each test shall be performed with one small static test load.

69.4.3 Warm-up test ([A-5R51-2, 5.2](#))

The warm-up test shall be performed in nonautomatic (static) operation. A single static test load near maximum capacity shall be used.

69.4.4 Eccentricity ([A-5R51-2, 5.7](#))

For instruments that weigh dynamically in automatic operation, the effect of eccentric loading shall be determined in automatic operation using a test load of $1/3 \text{ Max}$ (plus the additive tare capacity, if applicable) using the portion of the load transport system that is halfway between the centre and the back, and repeated with the same test load using the portion of the load transport system that is halfway between the centre and the front.

For instruments that weigh statically in automatic operation, the effect of eccentric loading shall be determined in nonautomatic (static) operation with a test load of $1/3 \text{ Max}$ (plus the additive tare capacity, if applicable) located in the centre ([A-5R51-2, 5.7.2](#)) and in each of the four quarter segments of the stationary load transport system.

On an instrument with a load transport system having n points of support, with $n > 4$, the fraction $1/(n-1)$ of Max (plus the additive tare capacity, if applicable) shall be applied to each point of support.

69.4.5 Influence factor tests

The mode of operation required for influence factor tests shall be decided as follows.

All instruments designed to weigh loose material may be tested in non-automatic (static) operation.

All tests with loads greater than or equal to 20 kg may be done in non-automatic (static) operation.

For instruments that weigh pre-assembled discrete loads dynamically, the mode of operation for influence factor tests shall be as specified for each individual test in Annex A.

For instruments that weigh pre-assembled discrete loads statically, the mode of operation for influence factor tests may be as specified for each individual test in Annex A or may be decided on by the procedure of 69.4.5.1.

69.4.5.1 Option for nonautomatic (static) testing

Formatted: Font: Bold

As an alternative to automatic operation during influence factor testing, static test loads may be applied in a nonautomatic (static) operation provided that:

- a) the instrument weighs statically in normal operation and,
- b) the test of 69.4.5.2 has demonstrated that random errors are not significant in normal operation and,
- c) where a decision is made to test in nonautomatic (static) operation this shall be applied to all the influence factor tests and recorded in the test report.

69.4.5.2 Determination of random errors for instruments that weigh statically

To determine whether static loads may be used for influence factor testing, the following test shall be applied before approval testing takes place: automatic test weighings, as specified in 69.1, shall be applied to the instrument under normal conditions of use for Min and Max load values and for the load transport system set to its maximum speed of operation and also approximately midway through the operating speed range.

Static loads may be used for influence factor testing where the results of these tests demonstrate that, for the test loads, the differences between the results of several weighings of the same load are not greater than the absolute value of the maximum permissible error of the instrument for that load given in Table 6 for initial verification.

69.5 Examination and tests of electronic instruments

The examination and testing of an electronic weighing instrument is intended to verify compliance with the applicable requirements of this Recommendation and especially with the requirements of [clause 457](#).

69.5.1 Examination

Formatted: Font: Bold

An electronic weighing instrument shall be examined to obtain a general appraisal of the design and construction.

69.5.2 Performance test

Formatted: Font: Bold

An electronic weighing instrument or electronic device, as appropriate, shall be tested as specified in Annex A to determine the correct functioning of the instrument.

Tests are to be carried out on the whole instrument except when the size and or configuration of the instrument does not lend itself to testing as a unit. In such cases the electronic devices shall be tested, where possible as a simulated instrument including all

electronic elements of a system which can affect the weighing result. In addition, an examination shall be carried out on the fully operational weighing instrument.

Susceptibility that would result from the use of electronic interfaces to other equipment shall be simulated in the tests.

69.5.3 Span stability test (4.6.4, 5.10, 9.4.1)

~~When the instrument is subjected to the span stability test specified in R 51-2, 7, shall verify that the EUT is capable of maintaining its performance characteristic over a period of use. A.7R51-2, 6.2, the absolute value of the difference between the errors obtained for any two measurements shall not exceed the maximum span error.~~

~~The maximum span error is equal to one half the maximum permissible error for influence factor tests for a near maximum capacity load.~~

ANNEX A

**TESTING PROCEDURES FOR AUTOMATIC CATCHWEIGHING INSTRUMENTS
(Mandatory)**

A.1 Examination for type approval

A.1.1 Documentation (5.2.1)

~~Review the documentation that is submitted, including necessary photographs, drawings, diagrams, general software information, relevant technical and functional description of main components, devices etc. to determine if it is adequate and correct. Consider the operational manual.~~

A.1.2 Compare construction with documentation

~~Examine the various devices of the instrument to ensure compliance with the documentation.~~

A.1.3 Metrological characteristics

~~Note the metrological characteristics according to the checklist given in the test report format, OIML R 51-2.~~

A.1.4 Technical requirements (3)

~~Examine the instrument for conformity with the technical requirements according to the checklist in the test report format, OIML R 51-2.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

A.1.5 Functional requirements (4.2)

Examine the instrument for conformity with the functional requirements according to the checklist given in the test report format, OIML R 51-2.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

A.2 Examination for initial verification

A.2.1 Compare construction with documentation

Examine the instrument for conformity with the approved type.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

A.2.2 Descriptive markings (3.11)

Check the descriptive markings according to the according to the check list given in the test report format, OIML R 51-2.

A.3 General test conditions

A.3.1 Voltage supply

Power up the equipment under test (EUT) for a time period equal to or greater than the warm-up time specified by the manufacturer and maintain the EUT energized for the duration of the test.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

A.3.2 Zero setting

Adjust the EUT as closely as practicable to zero prior to each test and do not readjust at any time during the test, except to reset if a significant fault has occurred.

Status of automatic zero facilities shall be as specified for each test.

A.3.3 Dynamic setting

Dynamic setting shall be done in accordance with manufacturers' instructions prior to commencing the tests.

Before commencing influence factor tests, dynamic setting may be repeated for each load value and thereafter may not be repeated.

Dynamic setting should not be repeated during disturbance tests except after a significant fault.

If the dynamic setting process is part of a calibration procedure for the whole weighing range then the dynamic setting should not be repeated before testing with different load values.

A.3.4 Static test loads

Static test loads shall be used for the influence factor testing in A.6.2 for machines designed to weigh loose material. For machines that weigh statically, where the conditions in 6.4.5 are met (including a test applied before the testing in A.6.2 commences) static test loads may optionally be used.

A.3.5 Temperature

~~Except for the temperature test (A.6.2.1) and the humidity test (A.6.2.3), the tests shall be performed at a steady ambient temperature, usually normal room temperature unless otherwise specified. The temperature is deemed to be steady when the differences between the extreme temperatures noted during the test does not exceed one-fifth of the temperature range of the instrument without being greater than 5 °C, and the rate of change does not exceed 5 °C per hour.~~

~~The handling of the instrument shall be such that no condensation of water occurs on the instrument.~~

~~A.3.6 Recovery~~

~~After each test, allow the instrument to recover sufficiently before the following test.~~

~~A.3.7 Preloading~~

~~Before each weighing test the instrument shall be pre-loaded to Max, except for the tests in A.5.2 (warm-up) and A.6.2.2 (temperature effect on no-load).~~

~~A.3.8 Multiple range instrument~~

~~In principle, each range should be tested as a separate instrument.~~

~~A.3.9 Evaluation of error in automatic operation~~

~~A.3.9.1 Category X~~

~~For category X instruments, indications and/or printouts of the weight values (or the difference between the weight value and a nominal set-point) shall be provided for each load for determining the mean error and the standard deviation of the error. With the scale interval d , the error of the MPME and MPSD shall be calculated for the number of individual loads defined in 6.1.2.~~

~~Alternatively, other practical means for demonstrating compliance with Tables 3 and 4 shall be provided by agreement with the metrological authority as described in 6.1.8.~~

~~A.3.9.2 Category Y~~

~~A.3.9.2.1 Indication with a scale interval not greater than 0.2 e~~

~~If an instrument with digital indication has a device for displaying the indication with an actual scale interval $d \leq 0.2 e$, this device shall be used to determine the error. When the device is used it should be noted in the test report.~~

~~A.3.9.2.2 Indication with a scale interval greater than 0.2 e~~

~~The rounding error included in any digital indication shall be eliminated if the actual scale interval d is greater than 0.2 e. This shall be accomplished by one of the following methods:~~

- ~~a) If possible, the mass of the test load shall be selected to eliminate the rounding error:~~
 - ~~• if the maximum permissible error = 1.5 e (or 0.5 e, 2.5 e, ...) the value of the mass of the test load shall be selected as close as possible to a whole scale interval.~~
 - ~~• if the maximum permissible error = 1.0 e (or 2.0 e, 3.0 e, ...) the mass of the test load shall be selected as close as possible to a whole scale interval plus (or minus) 0.5 e.~~

or

b) If a) is not applicable the rounding error shall be taken into consideration by adding an additional $0.5 e$ to the maximum permissible errors specified in Table 5.

A.3.10 — Evaluation of error in nonautomatic (static) operation

A.3.10.1 — Indication with a scale interval not greater than $0.2 e$

If an instrument with digital indication has a device for displaying the indication with $d \leq 0.2 e$, this device may be used to determine the error. If a device is used it should be noted in the test report.

A.3.10.2 — Use of standard weights to assess rounding error

A.3.10.2.1 — General method to assess error prior to rounding

For instruments with digital indication having scale interval e , changeover points may be used to interpolate between scale intervals i.e. to determine the indication of the instrument, prior to rounding, as follows:

At a certain load, L , the indicated value, I , is noted. Additional weights of say $0.1 e$ are successively added until the indication of the instrument is increased unambiguously by one scale interval ($I + e$). The additional load ΔL added to the load receptor gives the indication, P , prior to rounding by using the following formula:

$$P = I + 0.5 e - \Delta L$$

The error prior to rounding is:

$$E = P - L = I + 0.5 e - \Delta L - L$$

Example: an instrument with a scale interval e of 5 g is loaded with 1 kg and thereby indicates 1 000 g. After adding successive weights of 0.5 g, the indication changes from 1 000 g to 1 005 g at an additional load of 1.5 g. Inserted in the above formula these observations give:

$$P = (1\,000 + 2.5 - 1.5) \text{ g} = 1\,001 \text{ g}$$

Thus, the true indication prior to rounding is 1 001 g, and the error is:

$$E = (1\,001 - 1\,000) \text{ g} = +1 \text{ g}$$

A.3.10.2.2 — Correction for error at zero

Evaluate the error at zero load, (E_0) and the error at load L , (E), by the method of A.3.10.2.1.

The corrected error prior to rounding, (E_c) is:

$$E_c = E - E_0$$

Example: if, for the example in A.3.10.2.1, the error calculated at zero load was:

$$E_0 = +0.5 \text{ g},$$

the corrected error is:

$$E_c = +1 - (+0.5) = +0.5 \text{ g}$$

A.4 Test program

A.4.1 Type evaluation (5.2.3)

~~Clauses A.1 and A.5 to A.7 shall normally be applied for type evaluation, using the test methods detailed in Clause 6.~~

A.4.2 Initial verification (5.3)

~~Clauses A.2 and A.5, except for A.5.2 (warm-up) and A.5.4.2 (range of zero-setting), and for instruments mounted on vehicles A.6.2.8, shall be applied for initial verification.~~

~~The types of test loads used shall comply with 6.1.3.2.~~

A.5 Metrological performance tests

A.5.1 General

A.5.1.1 Standard operational test for automatic operation (5.2.3.1)

~~The test procedure shall be as follows:~~

- ~~(1) Start the automatic weighing system, including (if the EUT is installed in the place of use) the surrounding equipment which is normally operational when the instrument is in use.
Set the load transport system to its maximum speed of operation (6.1.4).~~
- ~~(2) Except where stated, select four test loads which must include values close to Min and Max and at values close to, but not above, two critical points (T.3.2.6) in between Min and Max (6.1.1). More than one test load may be required for each of the above load values to achieve the maximum rate of operation. Weigh the test loads on the control instrument specified in 6.1.5.1 to determine the conventional true value of each test load as specified in 6.1.6.~~
- ~~(3) The number of test weighings for each load depends on the mass of the test load as specified in 6.1.2.~~
- ~~(4) Enable the test loads to be automatically weighed for the specified number of times and record each indication. Determine the individual errors of weighing in accordance with:

 - ~~• 6.1.7.1 for category X instruments~~
 - ~~• 6.1.7.2 for category Y instruments~~~~
- ~~(5) Determine the mean error (T.4.3.5) and the standard deviation of the error (T.4.3.6) for category X instruments in accordance with 6.1.8, or the individual errors for category Y instruments.~~

~~The standard operational test is used for a number of different tests:~~

- ~~• dynamic setting,~~
- ~~• eccentricity for dynamic weighing instruments,~~
- ~~• static temperatures,~~
- ~~• temperature effect on no load indication,~~
- ~~• voltage variation,~~
- ~~• operational tests.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

A.5.1.2 Weighing performance test for nonautomatic (static) operation

The following weighing test shall be performed in nonautomatic (static) operation as an alternative to automatic operation during influence factor testing (A.6.2), provided the conditions of 6.4.5 are met.

Apply test loads from zero up to and including Max, and similarly remove the test loads back to zero. When determining the initial intrinsic error, at least 10 different test loads shall be selected, and for other weighing tests at least 5 shall be selected. The test loads selected shall include Max and Min, and at values close to, but not above, those at which the maximum permissible error changes.

It should be noted that when loading or unloading weights the load shall be progressively increased or decreased.

If the instrument is provided with an automatic zero setting or zero tracking device, it may be in operation during the tests, except for the temperature test. The error at zero point is then determined according to A.3.10.2.1.

A.5.1.3 Supplementary weighing test

For instruments with an initial zero setting device with a range greater than 20 % of Max, a supplementary weighing test shall be performed using the upper limit of the range as zero point.

A.5.2 Warm-up (4.2.3)

This test is to verify that metrological performance is maintained in the period immediately after switch on. The method is to check that automatic operation is inhibited until a stable indication is obtained and to verify that zero and span errors (4.3.3) comply with the requirements during the first 30 minutes of operation. Zero tracking and automatic zero setting shall be disabled, unless if the zero operates as part of every automatic weighing cycle then this function shall be enabled or simulated as part of the test.

Other test methods which verify that metrological performance is maintained during the first 30 minutes of operation may be used:

- (1) Disconnect the instrument from the supply for a period of at least 8 hours prior to the test.
- (2) Reconnect the instrument and switch on while observing the indication.
- (3) Check that it is not possible to initiate automatic weighing until the indicator has stabilized (4.2.4).
- (4) As soon as the indication has stabilized, set the instrument to zero if this is not done automatically.
- (5) Determine the error at zero by the method of A.3.10.2.1, and specify this error as E_{0i} (error of initial zero setting) at first and as E_0 (zero setting error) when repeating this step.
- (6) Apply a static load close to Max. Determine the error by the method of A.3.10.2.1 and A.3.10.2.2.
- (7) Verify that:
 - zero indication error (E_{0i}) is not greater than 0.25 e (3.5.2);
 - span error is not greater than the maximum permissible error specified in Table 6 for initial verification.
- (8) Repeat steps (5) and (6) after 5, 15 and 30 minutes.
- (9) After each time interval verify that:

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

- ~~zero variation error ($E_0 - E_{01}$) is not greater than $0.25 e \pm p$;~~
- ~~span error is not greater than the maximum permissible error specified in Table 6 for initial verification~~

A.5.3 ~~Range of dynamic setting (3.2.3)~~

A.5.3.1 ~~Range~~

~~If the dynamic setting facility is specified for a limited weighing range (or ranges) then the standard weighing test shall be done at load values close to the limits of the range for at least one of the nominal load values specified in A.5.1.1.~~

A.5.3.2 ~~Out of range interlock~~

~~If the dynamic setting facility is specified for a limited weighing range (or ranges) then it shall be verified that operation and print out outside of the specified range is inhibited, by attempting to weigh loads that are close to but outside the range.~~

A.5.4 ~~Zero-setting (3.5)~~

A.5.4.1 ~~Modes of zero-setting~~

~~To test the automatic zero-setting device it is necessary to allow the instrument to operate through the appropriate part of the automatic cycle and then to halt the instrument before testing.~~

~~The range and accuracy of zero-setting shall be tested by applying loads as specified below in nonautomatic (static) operation to the load receptor after the instrument is halted.~~

A.5.4.2 ~~Range of zero-setting~~

A.5.4.2.1 ~~Initial zero-setting~~

(a) ~~Positive range~~

~~With the load receptor empty, set the instrument to zero. Place a test load on the load receptor and switch the instrument off and then back on. Continue this process until, after placing a load on the load receptor and switching the instrument off and on, it does not reset to zero. The maximum load that can be re-zeroed is the positive portion of the initial zero-setting range.~~

(b) ~~Negative range~~

- ~~(1) Remove any load from the load receptor and set the instrument to zero. Then, if possible, remove any non-essential components of the load receptor. If, at this point, the instrument can be reset to zero by switching it off and back on, the mass of the non-essential components is used as the negative portion of the initial zero-setting range.~~
- ~~(2) If the instrument cannot be reset to zero with the non-essential components removed, add weights to any live part of the scale until the instrument indicates zero again.~~
- ~~(3) Then remove weights and, after each weight is removed, switch the instrument off and back on. The maximum load that can be removed while the instrument can still be reset to zero by switching it off and on is the negative portion of the initial zero-setting range.~~
- ~~(4) The initial zero-setting range is the sum of the positive and negative portions.~~

- (5) ~~Alternatively, if it is not possible to test the negative range of initial zero setting by removing parts of the instrument, the instrument may be temporarily re-calibrated with a test load applied before proceeding to step (3) above. (The test load applied for the temporary re-calibration should be greater than the permissible negative portion of the initial zero setting range which can be calculated from the result of the positive range test).~~
- (6) ~~If it is not possible to test the negative portion of the initial zero setting range by these methods then only the positive part of the initial zero setting range need be considered.~~
- (7) ~~Reassemble or recalibrate the instrument for normal use after the above tests~~

~~A.5.4.2.2 Nonautomatic and semi-automatic zero-setting~~

~~This test is performed in the same manner as described in A.5.4.2.1, except that the zero-setting device is used rather than switching the instrument on and off.~~

~~A.5.4.2.3 Automatic zero-setting~~

~~Remove the non-essential parts of the load receptor or re-calibrate the instrument as described in A.5.4.2.1 and place weights on the live part of the scale until it indicates zero.~~

~~Remove weights in small amounts and after each weight is removed allow the instrument to operate through the appropriate part of the automatic cycle so as to see if the instrument is reset to zero automatically.~~

~~The maximum load that can be removed so the instrument can still be reset to zero is the zero-setting range.~~

~~A.5.4.3 Accuracy of zero setting~~

~~The accuracy of zero setting shall be tested in nonautomatic (static) operation, by incrementing load weights by a small amount as described below.~~

- (1) ~~Set the instrument to zero and then disable the zero-setting functions. If the instrument has a zero-tracking device the indication must be brought out of the zero-tracking range (e.g. by loading with 10 e).~~
- (2) ~~Apply loads to the load receptor. Increment each successive load by a small amount (≤ 0.2 e) to determine the additional load at which the indication changes from zero to one scale interval above zero (or from one scale interval to the next above if a load of 10 e was added to disable zero tracking).~~
- (3) ~~Calculate the error at zero by the method of A.3.10.2.1.~~

~~Note: For practical reasons it may not be possible to determine the accuracy of the automatic zero-setting device using the method detailed above. However, the functionality of the device shall be checked by applying a load within the zero-setting range to a static part of the load receptor before an operational test. The effect of the automatic zero-setting device and its accuracy will thus be proven by the standard operational test in A.5.1.1.~~

~~A.5.5. Stability of zero and frequency of automatic zero-setting (3.5.4)~~

~~This test is applicable for instruments with programmable automatic zero-setting and does not need to be performed for instruments that have automatic zero-setting as part of every automatic weighing cycle.~~

To verify that an automatic zero-setting facility will operate sufficiently often to ensure that zero error is not greater than $0.5 e$, apply the following method:

- (1) Determine the maximum permissible time interval by selecting the smaller of the two values below:
 - the maximum time interval specified by the manufacturer in accordance with 3.5.4;
 - 3 minutes (classes XI and Y(I) instruments) or 15 minutes (all other classes), divided by the maximum zero change in fractions of e determined from A.6.2.2.
e.g. maximum zero change = $0.33 e$ per 5°C (class Y(a) instrument)
15 minutes / $0.33 = 45$ minutes (0.75 hour)
- (2) Allow the instrument to be reset to zero automatically.
- (3) After an interval close to the maximum permissible zero-setting interval established in (1) but before a further automatic zero-setting, carry out the test of A.5.4.3 (accuracy of zero setting).
- (4) Stages (2) and (3) shall also be carried out as soon the instrument is operable after switch-on, i.e. immediately after the normal warm-up time.

Note: the value of 3 or 15 minutes in (1) is determined by the following calculations:

- (a) the maximum allowable rate of change of a steady ambient temperature is 5°C per hour.
- (b) 3.5.2 gives the maximum allowable zero-setting error: $Ez_{\text{max}} \leq 0.25 e$
3.5.5 gives the maximum allowable zero-checking error: $Ez_{\text{max}} \leq 0.5 e$
this gives the maximum allowable zero-variation: $Ez_{\text{max}} - Ez_{\text{max}} = 0.25 e$

For classes XI and Y(I) instruments:

- A.6.2.2 requires the maximum allowable zero-variation: Δz_{max} per $1^{\circ}\text{C} \leq e$
with 5°C per hour for steady ambient temperature (a) Δz_{max} per $0.2 \text{ h} \leq e$
with maximum allowable zero-variation (b) Δz_{max} per 3 minutes $\leq 0.25 e$

For all other instruments:

- A.6.2.2 requires the maximum allowable zero-variation: Δz_{max} per $5^{\circ}\text{C} \leq e$
with 5°C per hour for steady ambient temperature (a) Δz_{max} per hour $\leq e$
with maximum allowable zero-variation (b) Δz_{max} per 15 minutes $\leq 0.25 e$.

A.5.6 Tare (3.6)

The normal mode(s) of tare setting shall be tested. Other methods which verify the requirements of 3.6 may be used where appropriate.

For a static tare, place the tare load on the load receptor and allow the tare function to operate (refer to the manufacturers instructions for the exact method).

For a dynamic tare, pass the load to be tared over the load receptor to allow the tare function to operate (refer to manufacturers instructions).

A.5.6.1 Weighing test

A.5.6.1.1 Automatic operation

The tests shall be carried out in automatic operation. Zero-setting functions shall be in operation. Operational tests (according to A.5.1.1) shall be performed with at least two

~~different tare values. At least two test load values shall be selected, one value close to Min and one close to the maximum possible net load.~~

~~If the instrument is equipped with an additive tare device one of the weighing tests shall be performed with a tare value close to the maximum additive tare effect.~~

A.5.6.1.2 — Nonautomatic (static) operation

~~Weighing tests (loading and unloading according to A.5.1.2) shall be performed with at least two different tare values. At least 5 load steps shall be selected. The steps shall include values close to Min, the values at which the MPE changes and the value close to the maximum possible net load.~~

~~If the instrument is equipped with an additive tare device one of the weighing tests shall be performed with a tare value close to the maximum additive tare effect.~~

A.5.6.2 — Accuracy of tare setting

~~The accuracy of the tare device shall be established in a manner similar to the test (accuracy of zero setting) described in A.5.4.3 with the indication set to zero using the tare device.~~

A.5.6.2.1 — Static tare

~~Allow the tare device to operate, then increment the tare load by using change point weights until the indication has definitely changed by one scale interval. Verify by the method of A.3.10.2.1 that the tare setting accuracy is better than $\pm 0.25 e$ with a deviation of not more than $0.25 e$.~~

A.5.6.2.2 — Dynamic tare

~~Allow the tare device to operate, halt the instrument, and determine the accuracy as per A.5.6.2.1 above or, if this method is impractical, the accuracy of the dynamic tare setting shall be tested by the operational tests in A.5.6.1 to verify that the value of the net load is within the MPE.~~

A.5.7 — Eccentricity (2.8.1 and 6.4.4)

A.5.7.1 — Eccentric test for instruments that weigh dynamically

~~The instrument shall be under conditions of normal operation. The test shall be carried out during automatic operation. Zero setting and zero tracking functions shall be in operation. Dynamic setting may be performed before each new value of test load is used.~~

~~Apply a load equal to $1/3 \text{ Max}$ (plus the additive tare capacity, if applicable) across the load receptor with the load at the centre of each of the following bands where:~~

~~Band 1 is from the centre of the load receptor to one edge of the transport system,
Band 2 is from the centre of the load receptor to the opposite edge of the transport system.~~

~~The load is passed across the load receptor the specified number of times (6.1.2). The errors shall not exceed the appropriate maximum permissible errors for influence factor tests.~~

A.5.7.2 — Eccentric test for instruments that weigh statically

~~Apply a load equal to $1/3 \text{ Max}$ (plus the additive tare capacity, if applicable) in each of the four quarter segments of the stationary load transport system. On an instrument with a load~~

transport system having n points of support with $n > 4$ the fraction $1/(n - 1)$ of Max (plus the additive tare capacity, if applicable) shall be applied to each point of support.

The load shall be applied centrally in the segment if a single weight is used, but applied uniformly over the segment, if several small weights are used.

The errors shall not exceed the appropriate maximum permissible errors for influence factor tests.

A.5.8 Alternative operating speeds (6.1.4)

The test procedure shall be as follows.

Start the automatic weighing system, including the surrounding equipment which is normally used when the instrument is in use. The test shall be carried out during automatic operation. Zero-setting functions shall be in operation. Dynamic setting may be performed before each new value of test load is used.

Two test load values are selected, one value close to Min and one value close to Max. One test load is used at each of the above load values.

The number of test weighings depends on mass of the test load (6.1.2).

The load transport system shall be set to its maximum speed of operation and also at a speed approximately midway through the operating range (6.1.4).

If the instrument is specified for alternative maximum capacities corresponding to alternative operating speeds then each speed must be tested with the correct load. In this case it is not necessary to retest minimum and critical load values for each speed.

The test load is passed across the load receptor the specified number of times and the results are noted. Maximum permissible errors shall be as specified in 2.5.1 as appropriate.

A.5.9 Test for the stability of equilibrium (3.4.1)

This test is applicable only to instruments that weigh statically.

Check the documentation of the manufacturer; whether the following stable equilibrium functions are described in detail and sufficiently:

- The basic principle, the function and the criteria for stable equilibrium.
- All adjustable and not adjustable parameters of the stable equilibrium function (time interval, number of measuring cycles, etc.).
- Securing of these parameters.
- Definition of the most critical adjustment of the stable equilibrium.

Apply a load up to 50 % of Max or up to a load included in the range of operation of the relevant function. Manually disturb the equilibrium by one single action and initiate the command for printing, data storage, or other function, as soon as possible. In the case of printing or data storage, read the indicated value 5 seconds after printing. Stable equilibrium is considered to be achieved when no more than two adjacent values are indicated, one of which being the printed final weight value (T3.2.4.3). In the case of zero setting or tare setting, check the accuracy as per A.5.4.3 and A.5.5.2. Perform the test 5 times.

~~Check whether under continuous disturbance of the equilibrium no functions can be performed that require stable equilibrium, e.g. printing, storing, or zero operations.~~

~~A.5.10 Agreement between indicating and printing devices (2.8.2)~~

~~During the tests verify that for the same load, the difference between any two indicating devices having the same scale interval is as follows:~~

- ~~• zero for digital indicating or printing devices;~~
- ~~• not greater than the maximum permissible error for analogue devices.~~

~~A.5.11 Securing of components and pre-set controls (3.2.6)~~

~~Verify that it is not possible to make unauthorised adjustments or resetting of components, interfaces, software devices and pre-set controls without any access becoming automatically evident.~~

~~A.6 Influence factor and disturbance tests~~

~~A.6.1 Test conditions~~

~~Further guidance on the metrological performance testing requirements for influence quantities and disturbances is provided in the appropriate reference standards as indicated for each test and in the OIML International Document D 11 [4].~~

~~A.6.1.1 General requirements~~

~~Influence factor and disturbance tests are intended to verify that electronic instruments can perform and function as intended in the environment and under the conditions specified. Each test indicates, where appropriate, the reference condition under which the intrinsic error is determined.~~

~~The influence factors tests shall be applied to a complete instrument under normal operation in accordance with 6.4.5. Where it is not possible to apply influence factor tests to fully operational equipment in their normal operational state (i.e. where size and/or configuration of the instrument does not permit testing as a whole) the instrument may be subjected to influence factor tests under simulated operation. If simulated operation is not possible, the instrument may be subjected to influence factor tests under static conditions as specified in 6.4.5.1.~~

~~Disturbances shall be applied to the instrument under static conditions. If the instrument cannot be subjected to disturbances under static conditions, then simulated operation may be permitted. The permissible effects of the disturbances, under these conditions, are specified for each test in A.6.3.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

~~When the effect of one influence factor is being evaluated, all other factors are to be held relatively constant, at a value close to normal.~~

~~Where parts of the instrument are examined separately, errors shall be apportioned in accordance with 5.2.3.4.~~

~~The operational status of the instrument or simulator shall be recorded for each test.~~

~~When an instrument is connected in other than a normal configuration, the procedure shall be mutually agreed by the metrological authority and the applicant.~~

~~A.6.1.2 Simulator requirements~~

~~A.6.1.2.1 General~~

~~Where permitted, the simulator used for influence factor and disturbances tests should include all electronic devices of the weighing system.~~

~~A.6.1.2.2 Weight simulator~~

~~The simulator should also include the load cell and a means to apply test loads. Where this is not possible, e.g. for high capacity instruments such as vehicle mounted catchweighers, then a load cell simulator may be used or alternatively the load cell interface may be modified to incorporate a scaling factor to give the design output for a small test load.~~

~~The simulator must be capable of providing a minimum input signal, $\mu\text{V/d}$ (minimum input voltage per scale interval).~~

~~Repeatability and stability of a load cell simulator should make it possible to determine the performance of the instrument with at least the same accuracy as when the instrument is tested with weights.~~

~~A.6.1.2.3 Documentation~~

~~Simulators shall be defined in terms of hardware and functionality by reference to the instrument under test, and by any other documentation necessary to ensure reproducible test conditions. This information shall be attached to, or traceable from, the test report.~~

~~A.6.2 Influence factor tests (2.9)~~

Summary of tests		
Test	Conditions applied	§
Static temperatures	MPE ⁽²⁾	A.6.2.1
Temperature effect on no load indication	MPE	A.6.2.2
Damp heat test steady state	MPE	A.6.2.3
AC mains voltage variations	MPE	A.6.2.4
DC mains voltage variations, including rechargeable battery if battery can be fully (re)charged during the operation of the instrument	MPE	A.6.2.5
Battery voltage variations (DC), non-rechargeable and	MPE	A.6.2.6

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

including rechargeable battery if (re)charge of battery during the operation of the instrument is not possible
12 V or 24 V road vehicle battery voltage variations
Tilting

MPE

A.6.2.7

MPE

A.6.2.8

^(*) maximum permissible errors as specified in 2.6

A.6.2.1 Static temperatures (2.9.1)

Static temperature tests are carried out according to basic standard IEC Publication 60068-2-1 [11], IEC Publication 60068-2-2 [12], and IEC 60068-3-1 [13], and according to Table 8.

Table 8 — Static temperatures tests

Environmental Phenomena	Test specification	Test set-up
Static temperatures	Reference temperature of 20 °C	IEC 60068-2-2 IEC 60068-2-4 IEC 60068-3-4
	Specified high temperature for 2 hours	
	Specified low temperature for 2 hours	
	Temperature of 5 °C, if within the specified temperature range	
	Reference temperature of 20 °C	
Note: Use IEC 60068-3-1 for background information.		

Supplementary information to the IEC test procedures:

Object of the test:	To verify compliance with the provisions in 4.1.1 under conditions of dry heat (non-condensing) and cold. The test in A.6.2.2 may be conducted during this test.
Test procedure in brief:	The test consists of exposure to the specified voltage supply condition for a period sufficient for achieving temperature stability and for performing the required measurements.
Preconditioning:	16 hours
Condition of the EUT:	EUT connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Voltage supply voltage is to be «on» for the duration of the test. The zero-setting and zero-tracking facilities shall be enabled as for normal operation.
Stabilisation:	2 hours at each temperature under «free air» conditions. «Free air» conditions mean a minimum air circulation to keep the temperature at a stable level.
Temperature:	As specified in 2.9.1.
Temperature sequence:	a) at the reference temperature (normally 20 °C but for classes XI and Y(I) instruments the mean value of the specified temperature limits); b) at the specified high temperature; c) at the specified low temperature; d) at a temperature of 5 °C, if it is within the specified range; and e) at the reference temperature

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Barometric pressure	For classes XI and Y(I) instruments, changes in barometric pressure shall be taken into account.
Number of test cycles:	At least one cycle.
Weighing test:	<p>After stabilization at the reference temperature and again at each specified temperature, conduct weighing tests in automatic mode with the maximum rate of operation (see A.5.1.1) except where specified in 6.4.5, using test loads of mass and test weighings according to 6.1.1 and 6.1.2. (For nonautomatic (static) tests see A.5.1.2). Record the following:</p> <ul style="list-style-type: none"> a) date and time; b) temperature; c) relative humidity; d) test load; e) indications (as applicable); f) errors; g) functional performance.
Maximum allowable variations:	<p>All functions shall operate as designed.</p> <p>All indications shall be within the maximum permissible errors specified in 2.6.</p>
A.6.2.2 Temperature effect on the no-load indication (2.9.1.3)	
No reference to international standards can be given at the present time. This test should therefore be conducted as described below.	
This test does not need to be performed for instruments that have automatic zero setting as part of every automatic weighing cycle.	
The instrument is set to zero, the temperature is then changed to the prescribed highest and lowest temperature and to 5 °C. After stabilization the error of the zero indication is determined. The change in zero indication per 1 °C (classes XI and Y(I) instruments) or per 5 °C (other instruments) is calculated. The changes of these errors per 1 °C (classes XI and Y(I) instruments) or per 5 °C (other instruments) are calculated for any two consecutive temperatures of this test.	
This test may be performed together with the temperature test (A.6.2.1). The errors at zero shall then be additionally determined immediately before changing to the next temperature and after the 2 hour period after the instrument has reached stability at this temperature.	
Note: — Pre loading is not allowed before these measurements.	
If the instrument is provided with automatic zero setting or zero tracking, it shall not be in operation.	
Maximum allowable variations:	The change in zero indication shall not vary by more than one verification scale interval for a temperature difference of 1 °C (classes XI and Y(I) instruments) or 5 °C (other instruments).
Condition of EUT:	EUT is connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm + 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

~~time specified by the manufacturer. Voltage supply voltage is to be «on» for the duration of the test.~~

~~Barometric pressure: For classes XI and Y(I) instruments, changes in barometric pressure shall be taken into account.~~

~~A.6.2.3 Damp heat, steady state – non-condensing (4.1.2)~~

~~These tests are not applicable to classes XI and Y(I) instruments, or classes XII and Y(II) instruments where e is less than 1 gram.~~

~~Damp heat, steady state test are carried out according to basic standard IEC Publication 60068-2-78 [14] and IEC Publication 60068-3-4 [15] and according to Table 9.~~

Table 9

Environmental phenomena	Test specification	Test set-up
Damp heat, steady state:	Upper limit temperature and relative humidity of 85% for 48 hours.	IEC 60068-2-78 IEC 60068-3-4
Note: Use IEC 60068-3-4 for guidance for damp heat tests.		

~~Supplementary information to the IEC test procedures:~~

~~Object of the test: To verify compliance with the provisions in 4.1.1 under conditions of high humidity and constant temperature.~~

~~Test procedure in brief: Five different test loads (A.5.1.2) in non-automatic (static) operation for instruments weighing statically or dynamically independent of the conditions of 6.4.5.~~

~~Preconditioning: None required.~~

~~Condition of the EUT: EUT is connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. The zero-setting and zero-tracking facilities shall be enabled as for normal operation.~~

~~The handling of the EUT shall be such that no condensation of water occurs on the EUT.~~

~~Stabilisation: 3 hours at reference temperature and 50 % humidity.
2 days at the upper limit temperature as specified in 2.9.1.~~

~~Temperature: Reference temperature (20 °C or the mean value of the temperature range whenever 20 °C is outside this range) and at the upper limit as specified in 2.9.1.~~

~~Temperature-humidity 48-hour sequence: a) Reference temperature of 20 °C at 50 % humidity;
b) Upper limit temperature at 85 % humidity;
c) Reference temperature of 20 °C at 50 % humidity.~~

~~Barometric pressure: For classes XI and Y(I) instruments, changes in barometric pressure shall be taken into account.~~

~~Number of test cycles: At least one cycle.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Weighing test:

~~After stabilisation of the EUT at reference temperature and relative humidity of 50 % apply at least five different test loads or simulated loads selected from 6.1.1 and perform the non-automatic (static) operation test in (A.5.1.2). Record the following:~~

- ~~a) date and time;~~
- ~~b) temperature;~~
- ~~c) relative humidity;~~
- ~~d) supply voltage;~~
- ~~e) test load;~~
- ~~f) indications (as applicable);~~
- ~~g) errors;~~
- ~~h) functional performance~~

~~After stabilisation of the EUT at the upper limit temperature and relative humidity of 85 % perform the weighing test (A.5.1.2) and record the data as indicated above.~~

~~After stabilisation of the EUT at reference temperature and relative humidity of 50 % perform the weighing test (A.5.1.2) and record the data as indicated above.~~

~~Allow full recovery of the EUT before any other tests are performed.~~

Maximum allowable variations:

~~All functions shall operate as designed.
All indications shall be within the maximum permissible errors specified in 2.6.~~

A.6.2.4 AC mains voltage variations (2.9.2, 4.2.5)

~~AC mains voltage variations tests are carried out according to basic standard IEC Publication 61000-2-1 [16] and IEC 61000-4-1 [17], and according to Table 11.~~

Table 11 AC mains voltage variations test

Environmental phenomena	Test specification	Test set-up
AC mains voltage variations	U_{nom}	
	Upper limit: 110 % of U_{max}	IEC 61000-2-4
	Lower limit: 85 % of U_{min}	IEC 61000-4-4
	U_{nom}	
Note: In the case of three-phase mains voltage, the voltage variation shall apply for each of the phase successively.		

Supplementary information to the IEC test procedures:

Object of the test: ~~To verify compliance with the provisions in 4.1.1 under conditions of AC mains voltage variations.~~

Test procedure in brief:

Preconditioning: ~~None required.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Condition of the EUT: EUT is connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test and do not readjust at any time during the test.

Number of test cycles: At least one cycle.

Weighing test: The EUT shall be tested with one test load selected from 6.1.1 at a critical value. The test shall be carried out in automatic operation (A.5.1.1), or optionally in nonautomatic (static) operation (A.5.1.2) where specified in 6.4.5, in which case a test load at or near Min and a test load between $\frac{1}{2}$ Max and Max shall be selected.

Changes in barometric pressure shall be taken into account.

Stabilize the EUT at the nominal voltage and record the following data at no load and with one load or simulated load:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;
- e) test load;
- f) indications (as applicable);
- g) errors;
- h) functional performance

Repeat the test for each of the voltages defined in IEC 61000-4-1 in section 5 (noting the need in certain cases that the test weighing will be repeated at both ends of the voltage range) and record the indications

Maximum allowable variations: All functions shall operate as designed. All indications shall be within the maximum permissible errors specified in 2.6.

A.6.2.5 DC mains voltage variations (2.9.2, 4.2.5, 4.2.6)

Instruments operating from the DC mains voltage, including rechargeable battery if full (re)charge of battery during the operation of the instrument is possible shall fulfil the tests in A.6.2, with the exception of A.6.2.4 which is to be replaced by the test according to basic standard IEC Publication 60654-2 [18] and according to Table 12.

Table 12 – DC mains voltage variations test

Environmental phenomena	Test specification	Test set-up
DC mains voltage variations	U_{nom}	IEC 60654-2
	Upper limit: U_{max}	
	Lower limit: minimum operating voltage (see 2.9.2)	
	U_{nom}	

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Note: In case a voltage range is marked, use the average value as nominal U_{nom}

Supplementary information to the IEC test procedures:

Object of the test: To verify compliance with the provisions in 4.1.1 under conditions of voltage variations in DC mains voltage supply, including rechargeable battery if battery is fully (re)charged during the operation of the instrument

Test procedure in brief: The test consists of exposure to the specified voltage supply voltage condition for a period sufficient for achieving temperature stability and for performing the required measurements.

Preconditioning: None

Condition of the EUT: EUT is connected to the voltage supply and "on" for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test.

Number of test cycles: At least one cycle.

Weighing test: The EUT shall be tested with one test load selected from 6.1.1 at a critical value. The test shall be carried out in automatic operation (A.5.1.1), or optionally in nonautomatic (static) operation (A.5.1.2).

Changes in barometric pressure shall be taken into account.

Stabilize the EUT at the nominal voltage and record the following data at no load and with one load or simulated load:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;
- e) test load;
- f) indications (as applicable);
- g) errors;
- h) functional performance

Reduce the voltage to the EUT until the instrument ceases to function properly according to the specifications and metrological requirements, and record the indications.

Maximum allowable variations: All functions shall operate as designed. All indications shall be within the maximum permissible errors specified in 2.6.

A.6.2.6 Battery voltage variations (not mains connected), non-rechargeable and also including rechargeable battery if (re)charge of battery during the operation of the instrument is not possible (2.9.2, 4.2.6)

Battery-powered instruments shall fulfil the tests in A.6.2, with the exception of A.6.2.4, A.6.2.5 and A.6.2.7 which are to be replaced by the test in Table 13.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Table 13 – Battery voltage variations test

Environmental phenomena	Test specification	Test set-up
Voltage variations of fully charged battery (DC)	U_{nom}	No reference to standards for this test.
	minimum operating voltage (see 2.9.2)	
	U_{nom}	
Note: In case a voltage range is marked, use the average value as nominal U_{nom}		

Supplementary test information:

Object of the test: ~~To verify compliance with the provisions in 4.1.1 under conditions of low voltage variations in non-rechargeable battery voltage supply (DC), including rechargeable battery if (re)charge of battery during the operation of the instrument is not possible.~~

Test procedure in brief: ~~The test consists of exposure to the specified condition of the battery for a period sufficient for achieving temperature stability and for performing the required measurements.~~

Pre-condition: None

Condition of the EUT: ~~EUT is connected to the battery voltage and "on" for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test.~~

Number of test cycles: At least one cycle.

Test information: ~~The EUT shall be tested with one test load selected from 6.1.1 at a critical value. The test shall be carried out in automatic operation (A.5.1.1), or optionally in nonautomatic (static) operation (A.5.1.2).~~

~~Changes in barometric pressure shall be taken into account.~~

~~Stabilize the EUT at the nominal voltage and record the following data at no load and with one load or simulated load:~~

- ~~a) date and time;~~
- ~~b) temperature;~~
- ~~c) relative humidity;~~
- ~~d) supply voltage;~~
- ~~e) test load;~~
- ~~f) indications (as applicable);~~
- ~~g) errors;~~
- ~~h) functional performance~~

~~Reduce the voltage to the EUT until the instrument ceases to function properly according to the specifications and metrological requirements, and record the indications.~~

Maximum allowable variations: ~~All functions shall operate as designed. All indications shall be within the maximum permissible errors~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

specified in 2.6.

A.6.2.7 — 12 V or 24 V road vehicle battery voltage variations (2.9.2, 4.2.6)

Instruments operated from 12 V or 24 V road vehicle battery voltage supply shall fulfil the tests in A.6.2, with the exception of A.6.2.4 and A.6.2.5 which is to be replaced by the following test according to ISO 16750-2 [25] and according to Table 14.

Table 14 — 12 V or 24 V road vehicle battery voltage variations test

Table 14: 12 V or 24 V road vehicle battery voltage variations test				
Environmental phenomena	Test specification			Test set-up
	U _{nom}	Upper limit	Lower limit	
Voltage variations of 12 V or 24 V road vehicle batteries	12 V	16 V	9 V	ISO 16750-2
	24 V	32 V	16 V	
Note:	The nominal voltage (U _{nom}) of the electrical system in road vehicles is usually 12 V or 24 V. But the practical voltage at the battery terminal points (T.2.7.4) can vary considerably.			

Supplementary information to the ISO test procedures:

Object of the test: To verify compliance with the provisions in 4.1.1 under conditions of voltage variations of 12 V or 24 V road vehicle battery voltage supply.

Test procedure in brief: The test consists of exposure to the specified battery condition for a period sufficient for achieving temperature stability and for performing the required measurements.

Preconditioning: None

Condition of the EUT: EUT is connected to the battery voltage and "on" for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test.

Number of test cycles: At least one cycle.

Weighing test: The EUT shall be tested with one test load selected from 6.1.1 at a critical value. The test shall be carried out in automatic operation (A.5.1.1), or optionally in nonautomatic (static) operation (A.5.1.2).

Changes in barometric pressure shall be taken into account.

Stabilize the EUT at the nominal voltage and record the following data at no load and with one load or simulated load:

- date and time;
- temperature;
- relative humidity;
- supply voltage;
- test load;

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

- ~~f) indications (as applicable);~~
- ~~g) errors;~~
- ~~h) functional performance~~

~~Reduce the voltage to the EUT until the instrument ceases to function properly according to the specifications and metrological requirements, and record the indications.~~

Maximum allowable variations:

All functions shall operate as designed.
All indications shall be within the maximum permissible errors specified in 2.6.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

~~A.6.2.8 Tilting (2.9.3)~~

~~No reference to international standards can be given at the present time. This test should therefore be conducted as described below.~~

~~Note: This test only applies to instruments that will not be permanently installed. This test is not required for transportable instruments with a levelling device and a level indicator if it can be established that the tilt can be adjusted to 1 % or less.~~

~~An instrument not intended for installation in a fixed position that does not have a levelling device and a level indicator, or an instrument mounted on or incorporated in a vehicle, shall be tested as follows:~~

Test information:

Object of the test: To verify compliance with the provisions in 2.9.3.

Test procedure in brief: The test consists of exposure to the specified voltage supply condition for a period sufficient for achieving temperature stability and for performing the required measurements.

Preconditioning: None required.

Condition of the EUT: Voltage supply «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Voltage is to be «on» for the duration of the test. The zero setting and zero tracking facilities shall be enabled as for normal operation. Zero setting and zero tracking shall be in operation.

Number of test cycles: At least one cycle.

Test severity: Operational tests with a load close to Min and Max at 5 % tilt. For vehicle mounted or incorporated catchweighers the tests shall be performed at 10 % tilt, or at a reduced value specified by manufacturer where the instrument is fitted with a tilt limiting device. Where applicable, a test of the operation of the tilt limiting device shall be performed.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Weighing test:

The test consists of conducting the operational tests as described in 5.2.3.1 (but only using loads close to Min and Max) at each of the following positions. The test shall be carried out

during automatic operation except where specified in 6.4.5. Re-zero at each new position prior to conducting the operational test:

- a) reference position
- b) $t\%$ longitudinally forward
- c) $t\%$ longitudinally backwards
- d) $t\%$ transversely forward
- e) $t\%$ transversely backwards
- f) reference position

where

$t\%$ = value of tilt specified in test severity above.

Record:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;
- e) test load;
- f) indications (as applicable);
- g) errors;
- h) functional performance

Maximum allowable variations:

All functions shall operate as designed.
All indications shall be within the maximum permissible errors specified in 2.6.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

A.6.3 Disturbance tests (4.1.3)

Summary of tests

Test	Condition applied	§
AC mains voltage short time power reductions		A.6.3.1
Electrical fast transients on mains voltage lines and on I/O circuits and communication lines	sf	A.6.3.2
Electrical surges on mains voltage lines and on I/O circuits and communication lines	sf	A.6.3.3
Electrostatic discharge	sf	A.6.3.4
Electromagnetic susceptibility	sf	A.6.3.5
Electrical transient conduction for instruments powered by 12 V and 24 V batteries	sf	A.6.3.6

(⁽¹⁾ sf: value of the significant fault (i.e. 1 e as given in T.4.3.9)

Prior to any test, the rounding error shall be set as close as possible to zero.

If there are interfaces on the instrument (or simulator), the use of these interfaces to other equipment shall be simulated in the tests. For this purpose, either an appropriate peripheral device or 3 m of interface cable to simulate the interface impedance of the other equipment, shall be connected to each different type of interface.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

A.6.3.1 AC mains voltage short time power reductions

Short time power reduction (voltage dips and short interruptions) tests are carried out according to basic standard IEC Publication 61000-4-11 [19] and according to Table 15.

Table 15 Short time power reductions

Environmental phenomena	Test specification			Test set-up
	Test	Reduction of amplitude to	Duration / Number of cycles	
Voltage dips and short interruptions	Test-a	0 %	0.5	IEC 61000-4-11
	Test-b	0 %	1	
	Test-c	40 %	10	
	Test-d	70 %	25	
	Test-e	80 %	250	
	Short interruption	0 %	250	
Notes:	A test generator suitable to reduce for a defined period of time the amplitude of one or more half cycles (at zero crossings) of the AC mains voltage shall be used. The test generator shall be adjusted before connecting the EUT. The mains voltage reductions shall be repeated 10 times with an interval of at least 10 seconds.			

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Supplementary information to the IEC test procedures

Object of the test: To verify compliance with the provisions in 4.1.3 under conditions of short time mains voltage interruptions and reductions while observing the weight indication of a single static load.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Test procedure in brief: The test consists of exposure to the specified voltage condition for a period sufficient for achieving temperature stability and for performing the required measurements.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Preconditioning: None required.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Condition of the EUT: EUT is connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Number of test cycles: At least one cycle.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Weighing test: The EUT shall be tested with one small static test load.

Formatted: Tab stops: 2.5 cm, Left

Stabilize all factors at nominal reference conditions. Apply one load or simulated load and record:

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

- a) date and time;
- b) temperature;
- c) relative humidity;

- d) ~~supply voltage;~~
- e) ~~test load;~~
- f) ~~indications (as applicable);~~
- g) ~~errors;~~
- h) ~~functional performance~~

~~In accordance with the test specification in Table 15, interrupt the supply voltages to the corresponding durations / number of cycles and conduct the test as detailed in IEC 61000-4-11 section 8.2.1. During interruption observe the effect on the EUT and record as appropriate.~~

~~Maximum allowable variations:~~

~~The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.~~

~~A.6.3.2 Electrical bursts (Fast transient tests) on the mains voltage lines and on the I/O circuits and communication lines~~

~~Electrical bursts tests (Fast transient tests) are carried out at the positive and the negative polarity for at least 1 minute at each polarity in accordance with the basic standard IEC 61000-4-4 [20] and according to Tables 16.1 and 16.2.~~

~~Table 16.1: Ports for signal lines and control lines~~

Environmental phenomena	Test specification	Test set-up
Fast transient common mode	0.5 kV (peak) 5/50 ns T_1/T_2 5 kHz rep. frequency	IEC 61000-4-4
Note: Applicable only to ports or interfacing with cables whose total length exceed 3 m according to the manufacturer's functional specification.		

~~Table 16.2: Input and output AC and DC power ports~~

Environmental phenomena	Test specification	Test set-up standard
Fast transient common mode	1 kV (peak) 5/50 ns T_1/T_2 5 kHz rep. frequency	IEC 61000-4-4
Note: DC power ports, not applicable to battery-operated appliance that cannot be connected to the mains while in use.		

~~Supplementary information to the IEC test procedures~~

~~Object of the test: To verify compliance with the provisions in 4.1.3 under conditions where fast transients are superimposed separately on the mains voltage, and on the I/O circuits and communication lines (if any).~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Test procedure in brief:	<p>while observing the indications for one static test load.</p> <p>The duration of the test shall not be less than one minute for each amplitude and polarity. The injection network on the mains shall contain blocking filters to prevent the burst energy being dissipated in the mains. For the coupling of the bursts into the input/output and communication lines, a capacitive coupling clamp as defined in the reference standard shall be used.</p>
Preconditioning:	None required.
Condition of the EUT:	<p>The performance of the test generator shall be verified before connecting the EUT.</p> <p>EUT is connected to the voltage supply source and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.</p>
Number of test cycles:	At least one cycle.
Weighing test:	<p>The EUT shall be tested with one small static test load.</p> <p>Changes in barometric pressure shall be taken into account.</p> <p>Before any test stabilize the EUT under constant environmental conditions. Apply one load or simulated load and record:</p> <p>a) date and time;</p> <p>b) temperature;</p> <p>c) relative humidity;</p> <p>d) supply voltage;</p> <p>e) test load;</p> <p>f) indications (as applicable);</p> <p>g) errors;</p> <p>h) functional performance</p>
Maximum allowable variations:	<p>The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.</p>

A.6.3.3 Surges on mains voltage lines and on I/O circuits and communication (signal) lines

Electrical surge tests are carried out according to IEC 61000-4-5 Bibliography [21] and according to Table 17.

Table 17

Environmental phenomena	Test specification	Test set-up
Surges on mains voltage lines and on I/O circuits and communication lines	<p>0.5 kV (peak) line to line 1.0 kV line to earth</p> <p>a) 3 positive and 3 negative surges applied synchronously with AC supply voltage in</p>	IEC 61000-4-5

	angles 0°, 90°, 180° and 270°. b) 3 positive and 3 negative surges applied on DC voltage lines and on I/O circuits and communication lines.	
Note:	<p>This test is only applicable in those cases where, based on typical situations of installation, the risk of a significant influence of surges can be expected. This is especially relevant in cases of outdoors installations and/or indoor installations connected to long signal lines (lines longer than 30 m or those lines partially or fully installed outside the buildings regardless of their length). The test is applicable to the voltage lines and other lines for communication, control, data or signal mentioned above. It is also applicable to DC powered instruments if the voltage supply comes from a DC network.</p>	

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Supplementary information to the IEC test procedures

Object of the test:	To verify compliance with the provisions in 4.1.3 under conditions where electrical surges are applied separately to the mains voltage lines, and to the I/O circuits and communication lines (if any), while observing the indications for one static test load.
Test procedure in brief:	<p>The test consists of exposure to surges for which the rise time, pulse width, peak values of the output voltage/current on high/low impedance load and minimum time interval between two successive pulses are defined in IEC 61000-4-5.</p> <p>The injection network depends on the lines the surge is coupled to and is defined in IEC 61000-4-5.</p>
Preconditioning:	None required.
Condition of the EUT:	<p>The characteristics of the test generator shall be verified before connecting the EUT.</p> <p>EUT connected to the voltage supply and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero-setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.</p>
Number of test cycles:	At least one cycle.
Weighing test:	<p>The EUT shall be tested with one small static test load.</p> <p>Changes in barometric pressure shall be taken into account.</p> <p>Before any test stabilize the EUT under constant environmental conditions. Apply one load or simulated load and record:</p> <p>a) date and time; b) temperature; c) relative humidity;</p>

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

- d) ~~supply voltage;~~
- e) ~~test load;~~
- f) ~~indications (as applicable);~~
- g) ~~errors;~~
- h) ~~functional performance~~

Maximum allowable variations:

~~The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

A.6.3.4 Electrostatic discharge

Electrostatic discharge tests are carried out according to basic standard IEC 61000-4-2 [22] and according to Table 18.

Table 18

Environmental phenomena	Test specification		Test set-up
Electrostatic discharge	Test voltage	Levels ⁽¹⁾	IEC 61000-4-2
	contact discharge	6 kV	
	air discharge	8 kV	
Notes: 1) ————— In this case "level" means up to and including the specified level (i.e. the test shall also be performed at the specified lower levels in IEC 61000-4-2.			
2) ————— The 6 kV contact discharge shall be applied to conductive accessible parts. Metallic contacts, e.g. in battery compartments or in socket outlets are excluded from this requirement.			

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

~~Contact discharge is the preferred test method. 20 discharges (10 with positive and 10 with negative polarity) shall be applied on each accessible metal part of the enclosure. The time interval between successive discharges shall be at least 10 seconds. In the case of a non conductive enclosure, discharges shall be applied on the horizontal and vertical coupling planes as specified in IEC 61000-4-2. Air discharges shall be used where contact discharges cannot be applied. Tests with other (lower) voltages than those given in Table 18 are not required.~~

Supplementary information to the IEC test procedures

Object of the test: ~~To verify compliance with the provisions in 4.1.3 under conditions where electrostatic discharges are applied while observing the weight indication for one small static test load.~~

Test procedure in brief:

Preconditioning: ~~None required.~~

Condition of the EUT: ~~The performance of the test generator shall be verified before connecting the EUT.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

~~EUT is connected to the voltage supply and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero-setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.~~

Number of test cycles:

~~At least one cycle.~~

Weighing test:

~~The EUT shall be tested with one small static test load.~~

~~Changes in barometric pressure shall be taken into account.~~

~~Before any test stabilize the EUT under constant environmental conditions. Apply one load or simulated load and record:~~

- ~~a) date and time;~~
- ~~b) temperature;~~
- ~~c) relative humidity;~~
- ~~d) supply voltage;~~
- ~~e) test load;~~
- ~~f) indications (as applicable);~~
- ~~g) errors;~~
- ~~h) functional performance~~

Maximum allowable variations:

~~The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.~~

A.6.3.5 — Electromagnetic susceptibility

A.6.3.5.1 — Radiated electromagnetic immunity tests

~~Radiated, radio frequency, electromagnetic field immunity tests are carried out according to IEC 61000-4-3 [23] and according to Table 19.~~

~~The unmodulated carrier of the test signal is adjusted to the indicated test value. To perform the test the carrier is in addition modulated as specified.~~

Table 19 — Radiated electromagnetic susceptibility

Test specification			
Environmental phenomena	Frequency ranges MHz	Field strength (V/m)	Test set-up
Radiated electromagnetic field	80 to 2000 ⁽¹⁾	10	IEC 61000-4-3
	26 to 80 ⁽²⁾		
	1400 to 2000		
Modulation	80 % AM, 1 kHz sine wave		

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Notes:	1) IEC 61000-4-3 only specifies test levels above 80 MHz. For frequencies in the lower range the test methods for conducted radio frequency disturbances are recommended (A.6.3.5.2). 2) For EUTs having no mains or other I/O ports available so that the test according to A.6.3.5.2 cannot be applied, the lower limit of the radiation test is 26 MHz.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
Supplementary information to the IEC test procedures		Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
Object of the test:	To verify compliance with the provisions in 4.1.3 under conditions of specified radiated electromagnetic fields applied while observing the weight indication for one small static test load.	Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
Test procedure in brief:		Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
Preconditioning:	None required.	Formatted: Tab stops: 2.5 cm, Left
Condition of the EUT:	The performance of the test generator shall be verified before connecting the EUT. EUT is connected to the voltage supply and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.	Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
Number of test cycles:	At least one cycle.	Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
Weighing test:	The EUT shall be tested with one small static test load. Changes in barometric pressure shall be taken into account. Before any test stabilize the EUT under constant environmental conditions. Apply one load or simulated load and record: a) date and time; b) temperature; c) relative humidity; d) supply voltage; e) test load; f) indications (as applicable); g) errors; h) functional performance	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
Maximum allowable variations:	The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.	Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
A.6.3.5.2 Conducted electromagnetic immunity tests		Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left

Conducted, radio-frequency, electromagnetic field immunity tests are carried out according to basic standard IEC 61000-4-6 [24] and according to Table 20.

The unmodulated carrier of the test signal is adjusted to the indicated test value. To perform the test the carrier is in addition modulated as specified.

Table 20 – Conducted electromagnetic susceptibility

Test specification			
Environmental phenomena	Frequency range MHz	RF amplitude (50 ohms) V (e.m.f)	Test set-up
Conducted electromagnetic field	0.15 to 80	10 V	IEC 61000-4-6
Modulation	80 % AM, 1 kHz sine wave		
Note:	This test is not applicable when the EUT has no mains or other input port.		

Coupling and decoupling devices shall be used for appropriate coupling of the disturbing signal (over the entire frequency range, with a defined common-mode impedance at the EUT port) to the various conducting cables connected to the EUT.

Supplementary information to the IEC test procedures

Object of the test: To verify compliance with the provisions in 4.1.3 under conditions of specified conducted electromagnetic fields applied while observing the weight indication for one small static test load.

Test procedure in brief:

Preconditioning: None required.

Condition of the EUT: The performance of the test generator shall be verified before connecting the EUT.

EUT is connected to the voltage supply and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable, prior to the test. Zero setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.

Number of test cycles: At least one cycle.

Weighing test: The EUT shall be tested with one small static test load. Changes in barometric pressure shall be taken into account. Before any test stabilize the EUT under constant environmental conditions. Apply one load or simulated load and record:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

- e) ~~test load;~~
 f) ~~indications (as applicable);~~
 g) ~~errors;~~
 h) ~~functional performance~~

Maximum allowable variations:

~~The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e, or the EUT shall detect and react to a significant fault.~~

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

~~A.6.3.6 Electrical transient conduction for instruments powered from a road vehicle battery~~

~~A.6.3.6.1 Conduction along supply lines of 12 V or 24 V road vehicle battery~~

~~For this test refer to ISO 7637-2 as detailed in [26] and according to Table 21.~~

~~Table 21 – Conduction along 12 V or 24 V supply lines~~

Environmental phenomena	Test specification			Test set-up
Conduction along 12 V or 24 V supply lines	Test pulse	Pulse voltage U_s		ISO 7637-2
		$U_{nom.} = 12\text{ V}$	$U_{nom.} = 24\text{ V}$	
	2a	+50 V	+50 V	
	2b ⁽⁴⁾	+10 V	+20 V	
	3a	-150 V	-200 V	
	3b	+100 V	+200 V	
	4	-7 V	-16 V	
Note:	Test pulse 2b is only applicable if the instrument is connected to the battery via the main (ignition) switch of the car, i.e. if the manufacturer has not specified that the instrument is to be connected directly (or by its own main switch) to the battery.			

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Supplementary information to the ISO test procedures

Applicable standards ISO 7637-2 § 5.6.2: Test pulse 2a + b,
 § 5.6.3: Test pulse 3a + 3b,
 § 5.6.4: Test pulse 4

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Object of the test: To verify compliance with the provisions in 4.1.3 under the following conditions while observing the weight indication for one small static test load:

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

- transients due to a sudden interruption of currents in a device connected in parallel with the device under test due to the inductance of the wiring harness (pulse 2a);
- transients from DC motors acting as generators after the ignition is switched off (pulse 2b);

- transients on the supply lines, which occur as a result of the switching processes (pulses 3a and 3b);
- voltage reductions caused by energizing the starter motor circuits of internal combustion engines (pulse 4).

Test Procedures in brief:

Preconditioning:

None

Condition of the EUT:

EUT is connected to the voltage supply and "on" for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable prior to the test. Zero setting functions shall not be in operation and are not be adjusted at any time during the test except to re-set if a significant fault has occurred.

Stabilisation:

Before any test stabilise the EUT under constant environmental conditions.

Weighing test:

The test consists of exposure of the EUT to conducted disturbances (on the voltage by direct brief coupling on supply lines) of the strength and character as specified in Table 21. Changes in barometric pressure shall be taken into account.

With the static load in place record:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;
- e) test load;
- f) indications (as applicable);
- g) errors;
- h) functional performance

Repeat the test weighing for the defined voltages and record the indications.

Maximum allowable variations:

The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e or the instrument shall detect and react to a significant fault.

A.6.3.6.2 Electrical transient conduction via lines other than supply lines

For this test refer to ISO 7637-3 [27] and according to Table 22.

Table 22—Electrical transient conduction via lines other than supply lines

Environmental phenomena	Test specification		Test set-up
Electrical transient conduction via lines	Test pulse	Pulse voltage U_s	ISO 7637-3
		$U_{nom} = 12\text{ V}$ $U_{nom} = 24\text{ V}$	

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

other than supply lines	a	-60 V	-80 V
	b	+40 V	+80 V

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Supplementary information to the ISO test procedures:

Applicable standards: ISO 7637-3, § 4.5: Test pulses a and b

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Object of the test: To verify compliance with the provisions in 4.1.3 under conditions of transients which occur on other lines as a result of the switching processes (pulses a and b).

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

The test shall be performed with one small test load only.

Test procedure in brief:

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Preconditioning: None

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Condition of the EUT: EUT is connected to the voltage supply and "on" for a time period equal to or greater than the warm-up time specified by the manufacturer. Adjust the EUT as close to zero indication as practicable prior to the test. Zero setting functions shall not be in operation and are not to be adjusted at any time during the test except to re-set if a significant fault has occurred.

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Stabilisation: Before any test stabilise the EUT under constant environmental conditions

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Weighing test: The test consists of exposure of the EUT to conducted disturbances (bursts of voltage spikes by capacitive and inductive coupling via lines other than supply lines) of the strength and character as specified in Table 21. Changes in barometric pressure shall be taken into account.

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

With the static load in place record:

- a) date and time;
- b) temperature;
- c) relative humidity;
- d) supply voltage;
- e) test load;
- f) indications (as applicable);
- g) errors;
- h) functional performance

Repeat the test weighing for the defined voltages and record the indications.

Maximum allowable variations: The difference between the weight indication due to the disturbance and the indication without the disturbance either shall not exceed 1 e or the instrument shall detect and react to a significant fault.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Note: An instrument must comply with the provisions in 4.1.3 in any type of vehicle.

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.54 cm

A.7 ~~Span stability test (4.3.3)~~

~~This test is not applicable to classes XI and Y(I) instruments~~

~~Test method: Span stability.~~

~~Object of the test: To verify compliance with the provisions in 4.3.3 after the EUT has been subjected to the performance tests.~~

~~Reference to standard: No reference to international standards can be given at the present time.~~

~~Test procedure in brief: The test consists of observing the variations of the error of the EUT under sufficiently constant ambient conditions (reasonably constant conditions in a normal laboratory environment) at various intervals: before, during, and after the EUT has been subjected to performance tests. For instruments with incorporated span adjustment device the device shall be activated during this test before each measurement in order to assess its stability and its intended use.~~

~~The performance tests shall include the temperature test and, if applicable, the damp heat test. Other performance tests listed in this Annex may be performed.~~

~~The EUT shall be disconnected from the mains voltage supply, or battery supply where fitted, two times for at least 8 hours during the period of the test. The number of disconnections may be increased if so specified by the manufacturer or at the discretion of the metrological authority in the absence of any specification.~~

~~In the conduct of this test, the operating instructions for the instrument as supplied by the manufacturer shall be considered.~~

~~The EUT shall be stabilized at sufficiently constant ambient conditions after switch-on for at least 5 hours, and at least 16 hours after the temperature and damp heat tests have been performed.~~

~~Test severity: Test duration: 28 days or the time period necessary to conduct the performance test, whichever is less.~~

~~Time (t) between tests: $0.5 \leq t \leq 10$ (days), with a fairly even distribution of the measurements over the total duration of the test.~~

~~Test load: a static test load near maximum capacity (Max); the same test weights shall be used throughout the test.~~

~~Maximum allowable variations: All functions shall operate correctly.~~

~~The variation in the indication of the test load shall not exceed 1/2 the absolute value of the MPE specified in Table 6 for the test load applied on any of the (n) tests conducted.~~

~~Number of tests (n): $n \geq 8$. If the test results indicate a trend, i.e. the errors continue to increase or decrease in the same direction,~~

~~conduct additional tests until the trend comes to rest or reverses itself, or until the error exceeds the maximum allowable variation.~~

~~Preconditioning: None required.~~

~~Test equipment: Verified mass standards.~~

~~Condition of EUT: EUT is connected to the voltage supply and «on» for a time period equal to or greater than the warm-up time specified by the manufacturer.~~

~~Adjust the EUT as close to a zero indication as practicable before each test. The automatic zero-tracking should be made inoperative during the test (if the EUT is so equipped).~~

~~Test sequence: Stabilize all factors at reference conditions.~~

~~Changes in barometric pressure shall be taken into account.~~

~~Apply the test load (or simulated load) and record the following data:~~

- ~~a) date and time,~~
- ~~b) temperature,~~
- ~~c) barometric pressure,~~
- ~~d) relative humidity,~~
- ~~e) test load,~~
- ~~f) indication,~~
- ~~g) errors,~~
- ~~h) functions performance,~~
- ~~i) changes in test location.~~

~~At the first measurement immediately repeat zeroing and loading four times to determine the average value of the error. For the next measurements perform only one, unless either the result is outside the specified tolerance or the range of the five readings of the initial measurement is more than 0.1 e. Allow full recovery of the EUT before any other tests are performed.~~

Annex B - BIBLIOGRAPHY

Below are references to Publications of the International Electrotechnical Commission (IEC), the International Organisation for Standardization (ISO) and the OIML, where mention is made in R 51-1.

<u>Ref.</u>	<u>Standards and reference documents</u>	<u>Description</u>
[1]	<u>International Vocabulary of Metrology -Basic and General Concepts and Associated Terms (VIM) (2012)</u>	<u>Vocabulary, prepared by a joint working group consisting of experts appointed by BIPM, IEC, IFCC, ISO, IUPAC, IUPAP and OIML</u>
[2]	<u>International Vocabulary of Terms in Legal Metrology, VIML, Paris (2000)</u>	<u>Vocabulary including only the concepts used in the field of legal metrology. These concepts concern the activities of the legal metrology service, the relevant documents as well as other problems linked with this activity. Also included in this Vocabulary are certain concepts of a general character which have been drawn from the VIM</u>
[3]	<u>OIML D 11:2013</u> <u>General requirements for electronic measuring instruments -</u> <u>Environmental Conditions</u>	<u>Contains general requirements for electronic measuring instruments</u>
[4]	<u>OIML R 111:2004</u> <u>Weights of classes</u> <u>$E_1, E_2, F_1, F_2, M_1, M_{1-2}, M_2, M_{2-3}$ and M_3</u>	<u>Provides the principal physical characteristics and metrological requirements for weights used with and for the verification of weighing instruments and weights of a lower class</u>
[5]	<u>OIML R 60:2000</u> <u>Metrological regulation for load cells</u>	<u>Provides the principal static characteristics and static evaluation procedures for load cells used in the evaluation of mass</u>

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.47 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm + 2.47 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.47 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm + 2.47 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.47 cm

<u>Ref.</u>	<u>Standards and reference documents</u>	<u>Description</u>
[6]	<u>OIML R 76-1:2006 <i>Non-automatic weighing instruments</i></u>	<u>Provides the principal physical characteristics and metrological requirements for the verification of non-automatic weighing instruments</u>
[7]	<u>OIML D 19:1988 <i>Pattern evaluation and pattern approval</i></u>	<u>Provides advice, procedures and influencing factors on pattern evaluation and pattern approval</u>
[8]	<u>OIML D 28 Edition 2004 (E)</u>	<u>Conventional value of the result of weighing in air</u>

Formatted: Tab stops: 2.5 cm, Left

<u>Ref.</u>	<u>Standards and reference documents</u>	<u>Description</u>
[1]	<u>International Vocabulary of Basic and General Terms in Metrology (VIM) (1993)</u>	<u>Vocabulary, prepared by a joint working group consisting of experts appointed by BIPM, IEC, IFCC, ISO, IUPAC, IUPAP and OIML</u>
[2]	<u>International Vocabulary of Terms in Legal Metrology, BIML, Paris (2000)</u>	<u>Vocabulary including only the concepts used in the field of legal metrology. These concepts concern the activities of the legal metrology service, the relevant documents as well as other problems linked with this activity. Also included in this Vocabulary are certain concepts of a general character which have been drawn from the VIM.</u>
[3]	<u>OIML B 3 (2003) <i>OIML Certificate System for Measuring Instruments (formerly OIML P1)</i></u>	<u>Provides rules for issuing, registering and using OIML Certificates of conformity</u>
[4]	<u>OIML D11 (2004) <i>General requirements for electronic measuring instruments</i></u>	<u>Contains general requirements for electronic measuring instruments</u>
[5]	<u>OIML R111 (2004) <i>Weights of classes E1, E2, F1, F2, M1, M1-2, M2, M2-3 and M3</i></u>	<u>Provides the principal physical characteristics and metrological requirements for weights used with and for the verification of weighing instruments and weights of a lower class.</u>
[6]	<u>OIML R 60 (2000) <i>Metrological regulation for load cells</i></u>	<u>Provides the principal static characteristics and static evaluation procedures for load cells used in the evaluation of mass</u>
[7]	<u>OIML R 87 (2004) <i>Quantity of products in prepackages</i></u>	<u>Provides the legal metrology requirements for prepacked products labelled in predetermined constant nominal quantities of weight, volume, linear measure, area or count, and sampling plans for use by legal metrology officials in verifying the quantity of products in prepackages</u>
[8]	<u>OIML D 19 (1988) <i>Pattern evaluation and pattern approval</i></u>	<u>Provides advice, procedures and influencing factors on pattern evaluation and pattern approval</u>

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

	approval	
[9]	OIML D 20 (1988) Initial and subsequent verification of measuring instruments and processes	Provides advice, procedures and influencing factors on the choice between alternative approaches to verification and the procedures to be followed in the course of verification

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Formatted: Tab stops: 2.5 cm, Left

Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Ref.	Standards and reference documents	Description	Formatted: Tab stops: 2.5 cm, Left
[10]	OIML R 76-1—Non-automatic weighing instruments. Second Committee draft revision (2005)	Provides the principal physical characteristics and metrological requirements for the verification of non-automatic weighing instruments	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[11]	IEC 60068-2-1 (1990-05) with amendments 1 (1993-02) and 2 (1994-06) Environmental testing, Part 2: Tests, Test A: Cold	Concerns cold tests on both non-heat dissipating and heat dissipating equipment under test (EUT).	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[12]	IEC 60068-2-2 (1974-01) with amendments 1 (1993-02) and 2 (1994-05) Environmental testing Part 2: Tests, Test B: Dry heat	Contains test Ba: dry heat for non-heat dissipating specimen with sudden change of temperature; test Bb dry heat for non-heat dissipating specimen with gradual change of temperature; tests Bc: dry heat for heat dissipating specimen with sudden change of temperature; test Bd dry heat for heat dissipating specimen with gradual change of temperature. The 1987 reprint includes IEC No. 62-2-2A	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[13]	IEC 60068-3-1 (1974-01) + Supplement A (1978-01): Environmental testing Part 3 Background information, Section 1: Cold and dry heat tests	Gives background information for Tests A: Cold (IEC 68-2-1), and Tests B: Dry heat (IEC 68-2-2). Includes appendices on the effect of: chamber size on the surface temperature of a specimen when no forced air circulation is used; airflow on chamber conditions and on surface temperatures of test specimens; wire termination dimensions and material on surface temperature of a component; measurements of temperature, air velocity and emission coefficient. Supplement A—gives additional information for cases where temperature stability is not achieved during the test.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[14]	IEC 60068-2-78 (2001-08) Environmental testing—Part 2-78: Tests—Test Cab: Damp heat, steady state (IEC 60068-2-78 replaces the following withdrawn standards: IEC 60068-2-3, test Ca and IEC 60068-2-56, test Cb)	Provides a test method for determining the suitability of electro-technical products, components or equipment for transportation, storage and use under conditions of high humidity. The test is primarily intended to permit the observation of the effect of high humidity at constant temperature without condensation on the specimen over a prescribed period. This test provides a number of preferred severities of high temperature, high humidity and test duration. The test can be applied to both heat-dissipating and non-heat dissipating specimens. The test is applicable to small equipment or components as well as large equipment having complex interconnections with test equipment external to the chamber, requiring a set-up time which prevents the use of preheating and the maintenance of specified conditions during the installation period.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Ref.	Standards and reference documents	Description	Formatted: Tab stops: 2.5 cm, Left
[15]	IEC 60068-3-4 (2001-08) Environmental testing – Part 3-4: Supporting documentation and guidance – Damp heat tests	Provides the necessary information to assist in preparing relevant specifications, such as standards for components or equipment, in order to select appropriate tests and test severities for specific products and, in some cases, specific types of application. The object of damp heat tests is to determine the ability of products to withstand the stresses occurring in a high relative humidity environment, with or without condensation, and with special regard to variations of electrical and mechanical characteristics. Damp heat tests may also be utilized to check the resistance of a specimen to some forms of corrosion attack.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[16]	IEC 61000-2-1 (1990-05) Electromagnetic compatibility (EMC) Part 2: Environment Section 1	Electromagnetic compatibility (EMC) Part 2: Environment Section 1: Description of the environment – Electromagnetic environment for low-frequency conducted disturbances and signalling in public power supply systems	Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left
[17]	IEC 61000-4-1 (2000-04) Basic EMC Publication Electromagnetic compatibility (EMC) Part 4: Testing and measurement techniques. Section 1: Overview of IEC 61000-4 series.	Gives applicability assistance to the users and manufacturers of electrical and electronic equipment on EMC standards within the IEC 61000-4 series on testing and measurement techniques. Provides general recommendations concerning the choice of relevant tests	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[18]	IEC 60654-2 (1979-01), with amendment 1 (1992-09). Operating conditions for industrial- process measurement and control equipment – Part 2: Power.	Gives the limiting values for power received by land-based and offshore industrial process measurement and control systems or parts of systems during operation.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[19]	IEC 61000-4-11 (2004-03) Electromagnetic compatibility (EMC) Part 4-11: Testing and measuring techniques – Voltage dips, short interruptions and voltage variations immunity tests	Defines the immunity test methods and range of preferred test levels for electrical and electronic equipment connected to low-voltage power supply networks for voltage dips, short interruptions, and voltage variations. This standard applies to electrical and electronic equipment having a rated input current not exceeding 16 A per phase, for connection to 50 Hz or 60 Hz AC networks. It does not apply to electrical and electronic equipment for connection to 400 Hz AC networks. Tests for these networks will be covered by future IEC standards. The object of this standard is to establish a common reference for evaluating the immunity of electrical and electronic equipment when subjected to voltage dips, short interruptions and voltage variations. It has the status of a Basic EMC Publication in accordance with IEC Guide 107.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
			Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Ref.	Standards and reference documents	Description	Formatted: Tab stops: 2.5 cm, Left
[20]	IEC 61000-4-4 (2004-07) Electromagnetic compatibility (EMC) Part 4-4: Testing and measurement techniques – Electrical fast transient/burst immunity test.	Establishes a common and reproducible reference for evaluating the immunity of electrical and electronic equipment when subjected to electrical fast transient/burst on supply, signal, control and earth ports. The test method documented in this part of IEC 61000-4 describes a consistent method to assess the immunity of an equipment or system against a defined phenomenon. The standard defines: — test voltage waveform; — range of test levels; — test equipment; — verification procedures of test equipment; — test set up; and — test procedure. The standard gives specifications for laboratory and post installation tests.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[21]	IEC 61000-4-5 (2001-04) consolidated edition 1.1 (Including Amendment 1 and Correction 1) Electromagnetic compatibility (EMC) Part 4-5: Testing and measurement techniques – Surge immunity test	Relates to the immunity requirements, test methods, and range of recommended test levels for equipment to unidirectional surges caused by over-voltages from switching and lightning transients. Several test levels are defined which relate to different environment and installation conditions. These requirements are developed for and are applicable to electrical and electronic equipment. Establishes a common reference for evaluating the performance of equipment when subjected to high-energy disturbances on the power and inter-connection lines.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[22]	IEC 61000-4-2 (1995-01) with amendment 1 (1998-01) and amendment 2 (2000-11) Consolidated Edition: IEC 61000-4-2 (2001-04) Ed. 1.2.	Basic EMC Publication. Electromagnetic Compatibility (EMC) – Part 4: Testing and measurement techniques – Section 2: Electrostatic discharge immunity test. Basic EMC Publication.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[23]	IEC 61000-4-3 Consolidated Edition 2.1 (including amendment 1) (2002-09)	Electromagnetic Compatibility (EMC) – Part 4: Testing and measurement techniques – Section 3: Radiated, radio frequency, electromagnetic field immunity test.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm

Ref.	Standards and reference documents	Description	Formatted: Tab stops: 2.5 cm, Left
[24]	IEC 61000-4-6 (2003-05) with amendment 1 (2004-10) Electromagnetic compatibility (EMC) Part 4: Testing and measurement techniques. Section 6: Immunity to conducted disturbances, induced by radio frequency fields	Relates to the conducted immunity requirements of electrical and electronic equipment to electromagnetic disturbances coming from intended radio frequency (RF) transmitters in the frequency range 9 kHz up to 80 MHz. Equipment not having at least one conducting cable (such as mains supply, signal line or earth connection), which can couple the equipment to the disturbing RF fields is excluded. This standard does not intend to specify the tests to be applied to particular apparatus or systems. Its main aim is to give a general basic reference to all concerned product committees of the IEC. The product committees (or users and manufacturers of equipment) remain responsible for the appropriate choice of the test and the severity level to be applied to their equipment.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[25]	ISO 16750-2 (2003)	Road vehicles — Environmental conditions and testing for electrical and electronic equipment — Part 2: Electrical loads	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[26]	ISO 7637-2 (2004)	Road vehicles — Electrical disturbance by conduction and coupling — Part 2: Electrical transient conduction along supply lines only.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
[27]	ISO 7637-3 (1995) with correction 1 (1995)	Road vehicles — Electrical disturbance by conduction and coupling — Part 3: Passenger cars and light commercial vehicles with nominal 12 V supply voltage and commercial vehicles with 24 V supply voltage — electrical transient transmission by capacitive and inductive coupling via lines other than supply lines.	Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm
			Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left Formatted: Tab stops: 2.5 cm, Left + Not at 2.25 cm Formatted: Tab stops: 2.5 cm, Left